

NODE POINT MEASUREMENTS

C-D = 20'-5"
C-E = 24'-9"
C-F = 26'-6"
C-G = 16'-9"
C-H = 9'-2"
C-I = 12'-10"
C-J = 23'-0"
C-K = 29'-8"
C-L = 19'-10"

D-E = 7'-0"
D-F = 6'-11"
D-G = 9'-7"
D-H = 21'-2"
D-I = 29'-10"
D-J = 27'-7"
D-K = 14'-3"
D-L = 17'-11"

E-F = 10'-1"
E-G = 16'-7"
E-H = 27'-4"
E-I = 35'-7"
E-J = 34'-7"
E-K = 19'-0"
E-L = 15'-7"

F-G = 12'-0"
F-H = 25'-6"
F-I = 34'-5"
F-J = 28'-8"
F-K = 8'-11"
F-L = 24'-6"

G-H = 13'-8"
G-I = 22'-7"
G-J = 18'-0"
G-K = 12'-11"
G-L = 23'-10"

H-I = 8'-11"
H-J = 13'-10"
H-K = 25'-10"
H-L = 27'-1"


I-J = 17'-2"
I-K = 34'-6"
I-L = 32'-8"

J-K = 24'-4"
J-L = 39'-1"

KL = 32'-3"

RADII MEASUREMENTS

C = 8' RADIUS
D = 11' RADIUS
E = 4' RADIUS
F = 4' RADIUS
G = 8' RADIUS
H = 4' RADIUS
I = 4'-10" RADIUS
J = 9'-10" RADIUS
K = 4'-10" RADIUS
L = 11'-10" RADIUS

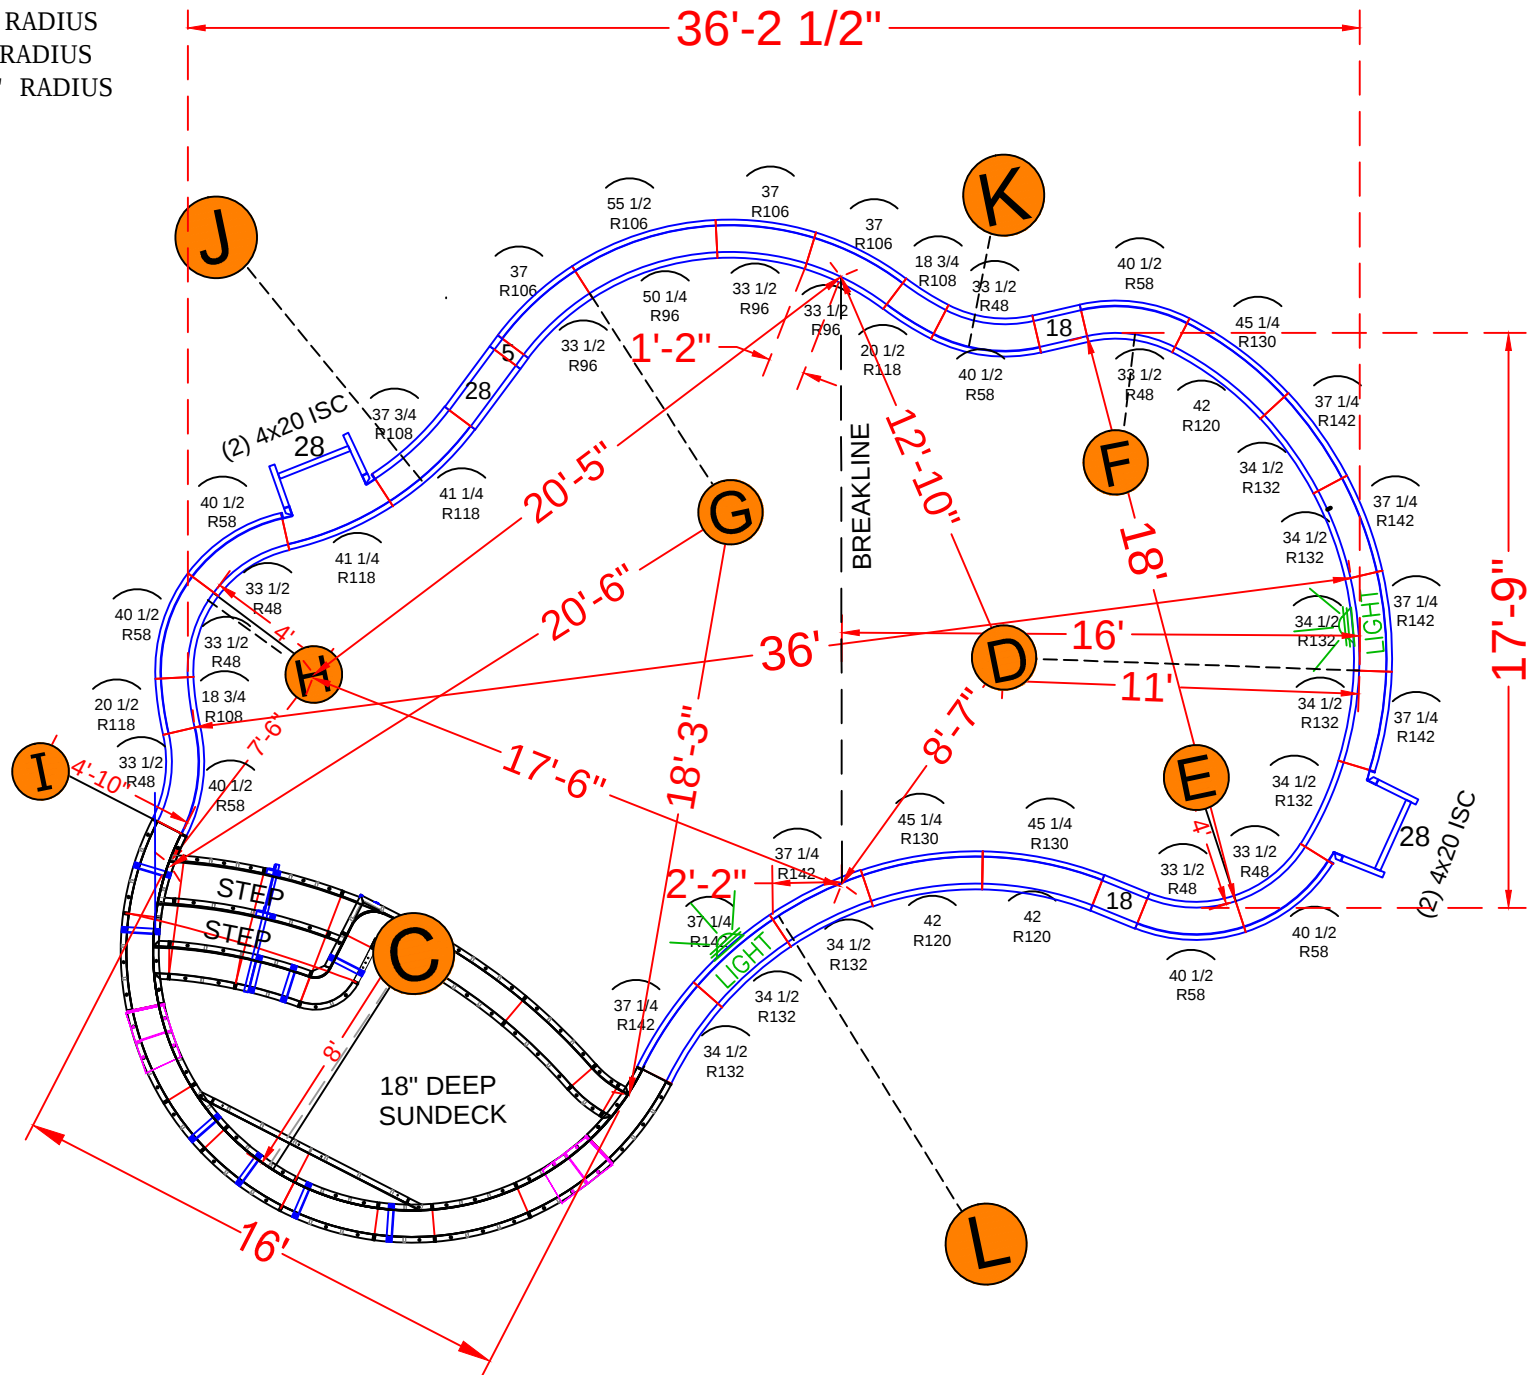

NOTE: SEE CONSTRUCTION PLANS FOR POOL AND A-B LOCATION

POOL PANEL DESCRIPTIONS

QTY.	DESCRIPTION
1	8' Radius Sundeck/Step Assembly (Yellow Panels)
4	4" x 20" x 48" Adj Offset Hinged ISC (Pilaster)
	STRAIGHT PANELS
2	5" x 48" Straight
4	18" x 48" Straight
4	28" x 48" Straight
	RADIUS PANELS
7	33 1/2" x 48" - 48" Radius Panel
7	40 1/2" x 48" - 58" Radius Panel
3	33 1/2" x 48" - 96" IS Radius Panel
3	37" x 48" - 106" OS Radius Panel
1	37 3/4" x 48" - 108" Radius Panel
2	41 1/4" x 48" - 118" Radius Panel
1	50 1/4" x 48" - 96" IS Radius Panel
1	55 1/2" x 48" - 106" OS Radius Panel
2	18 3/4" x 48" - 108" Radius IS Panel
2	20 1/2" x 48" - 118" Radius OS Panel
3	42" x 48" - 120" Radius Panel
3	45 1/4" x 48" - 130" Radius Panel
8	34 1/2" x 48" - 132" Radius Panel
7	37 1/4" x 48" - 142" Radius Panel

GELBERG - 17 Marshall Way

17'-9" x 29'-6" x 37'-3" - 10" Concrete Wall - Freeform
w/ Interior Vinyl Covered Sun Deck & Step Combo
Pool Perimeter = 108 Ln. Ft.
Pool Area = 697 Sq. Ft.
Approximate Pool Gallons: 18,690 Gallons

Concrete Yards

- Pool Walls & Sundeck: 17 yards


PANEL LAYOUT

JOB #: 555608
DATE: 11-12-2021
DRAWN BY: SA

REVISIONS





SEASONAL WORLD
WE BUILD BACKYARDS!

(A) 
Qty (1) - 21 7/8" Wall Tie - 2nd Top Rise
1/4" BB

(B) 
Qty (3) - 41 29/32" Wall Tie - Bottom Rise
1/4" BB

(C) 
Qty (2) - 86 13/16" Wall Tie - Bottom Wall
1/4" BB

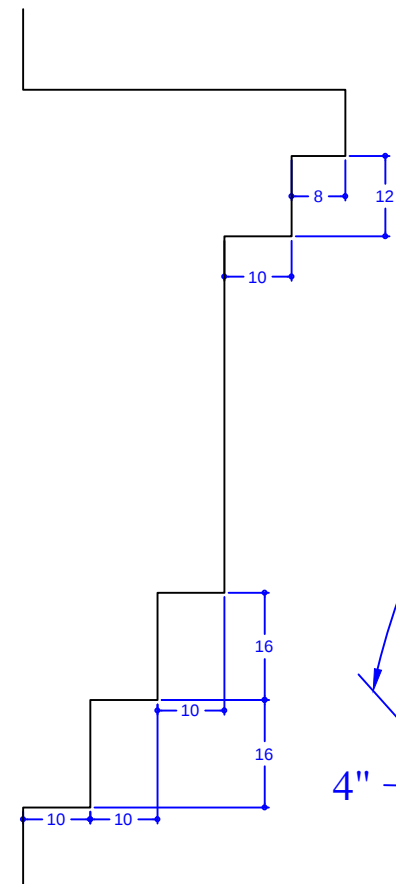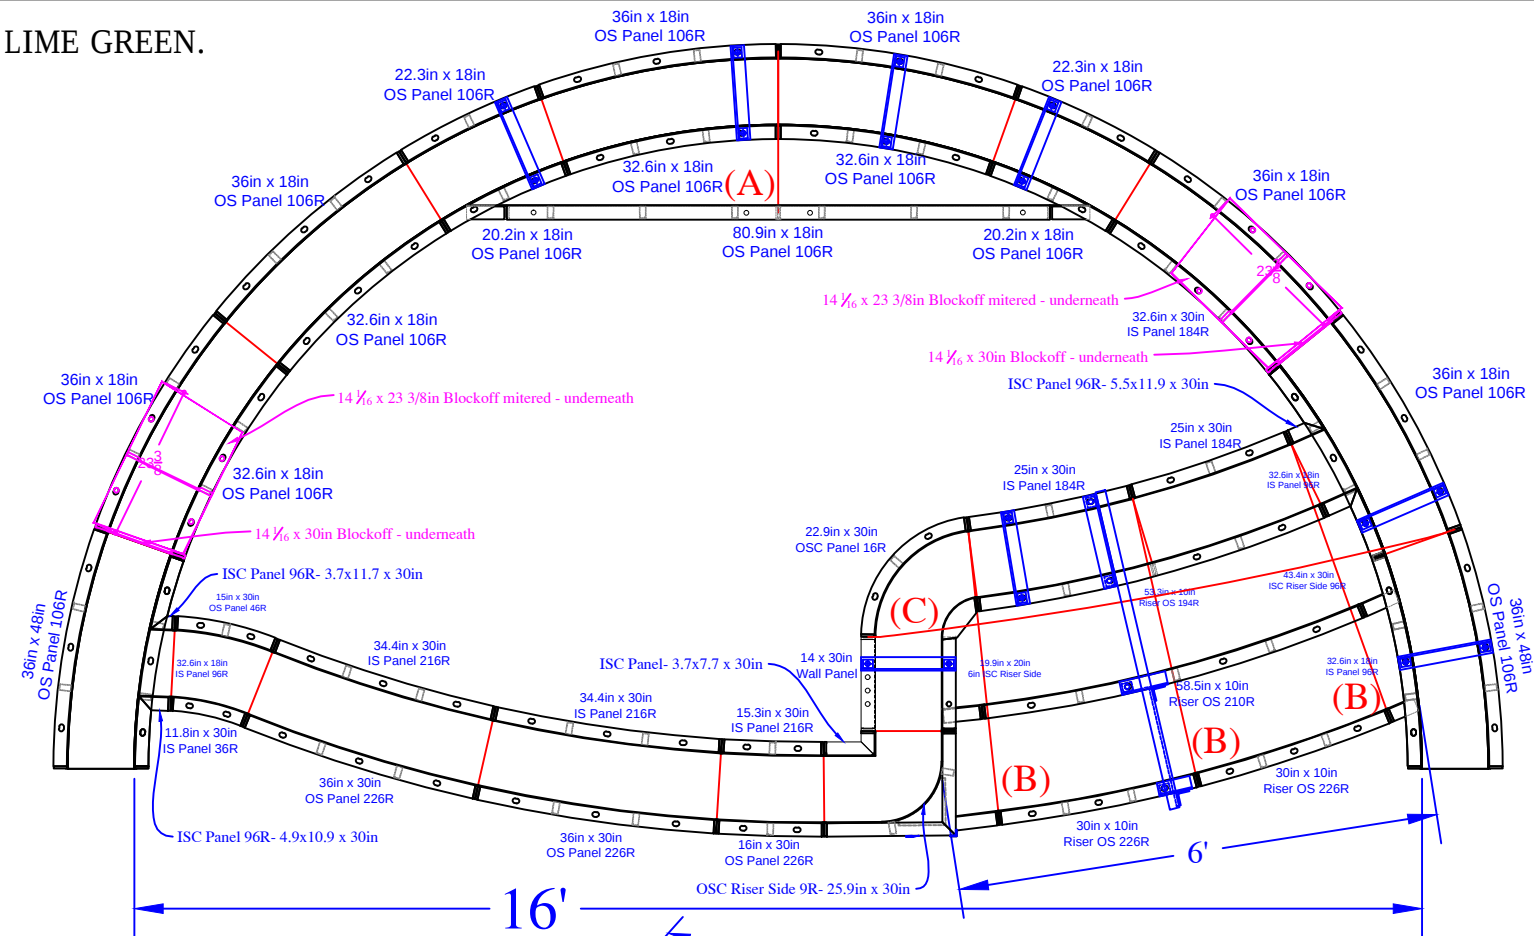

QTY	DESCRIPTION
3	36in x 48in OS Panel 106R
1	16in x 30in OS Panel 226R
2	36in x 30in OS Panel 226R
1	15.3in x 30in IS Panel 216R
2	34.4in x 30in IS Panel 216R
1	15in x 30in OS Panel 46R
1	11.8in x 30in IS Panel 36R
2	25in x 30in IS Panel 184R
1	14in x 30in Wall Panel
2	22.3in x 18in OS Panel 106R
5	36in x 18in OS Panel 106R
6	32.6in x 18in IS Panel 96R
1	4.9in x 10.9in x 30in ISC Panel 96R
1	3.7in x 11.7in x 30in ISC Panel 96R
1	5.5in x 11.9in x 30in ISC Panel 96R
1	3.7in x 7.7in x 30in ISC Panel
1	22.9in x 30in OSC Panel 16R
2	32.6in x 8in Riser IS 96R - Top Upper
2	20.2in x 18in ISC Riser Side 96R
1	43.4in x 30in ISC Riser Side 96R
1	19.9in x 20in 6in ISC Riser Side
1	25.9in x 30in OSC Riser Side 9R
1	80.9in x 10in Riser - Bottom Upper
1	53.3in x 10in Riser OS 194R- Top Lower
1	58.5in x 10in Riser OS210R- 2nd Top Lower
2	30in x 10in Riser OS226R- Bottom Lower
2	14 1/16in x 23.3in Blockoff mitered
2	14 1/16in x 30in Blockoff
8	Parapet Brackets - 10in Wall
1	Parapet Brackets - 42in Wall
1	22" Full Wall Tie "A"- 2nd Top Rise
3	41 29/32" Wall Tie "B"- Bottom Rise
2	86 13/16" Wall Tie "C"- Bottom Wall

GELBERG - 17 Marshall Way

Concrete Yards

- Pool Walls & Sundeck: 17 yards

STEP DETAIL			
JOB #: 555608			
DATE: 11-12-2021			
DRAWN BY: SA			



SEASONAL WORLD
WE BUILD BACKYARDS!