


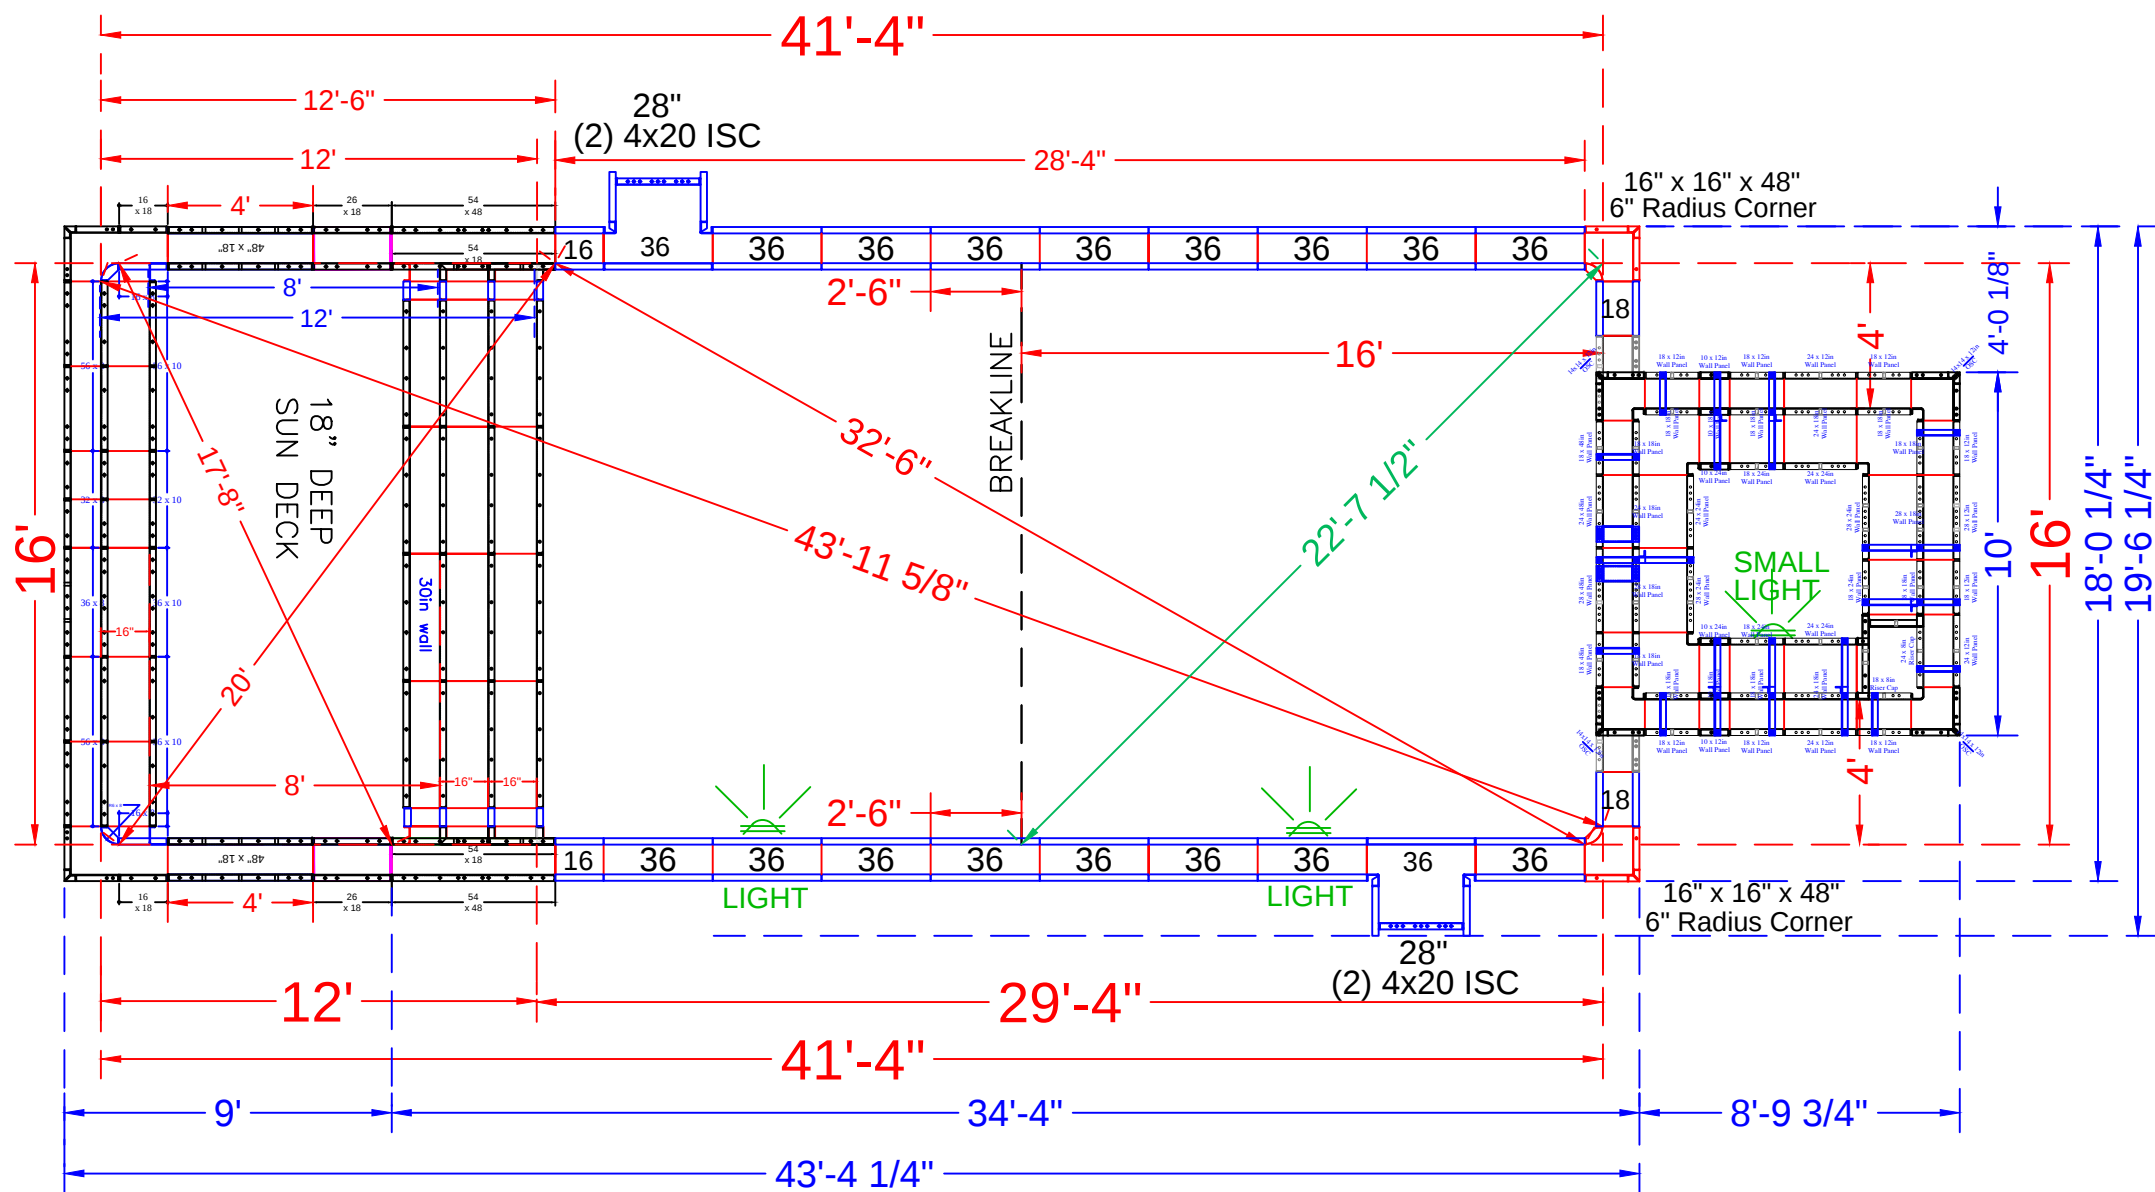

NOTE: SEE CONSTRUCTION PLANS FOR POOL LOCATION

POOL PANEL DESCRIPTIONS	
QTY.	DESCRIPTION
1	16' Wide Rectangle Sun Deck & Step Assembly
1	8'x8' Square Spa Assembly
CORNER PANELS & HINGES	
2	16" x 16" x 48 w/ Outside Corner-SA (6" Radius)
SKIMMER SIDES {	
2	20" x 4" x 48" Adj Offset Hinged ISC (Pilaster)
STRAIGHT PANELS	
4	16" x 48" Panel
4	18" x 48" Panel
2	28" x 48" Panel
34	36 x 48" Panel

RUIU - 1 Bur Court


16' x 41'-4''' - 10" Concrete Wall - Rectangle
w/ 16' x 8' Sun Deck & Entry Step Combo
Pool Perimeter = 114 Ln. Ft.
Pool Area = 661 Sq.Ft.
Approximate Pool Gallons: 16,637 Gallons

Concrete Yards
- Pool Walls,Steps & Spa: 27.5 yards


PANEL LAYOUT			
JOB #: 2020-1200			
DATE: 1-9-2021			
DRAWN BY: SA			
REVISIONS			




print #	print #	QTY.	DESCRIPTION	print #	print #	QTY.	DESCRIPTION	print #	print #	QTY.	DESCRIPTION
RESSD 7.03	ESSD 1.54	2	54 x 48in Wall Panel	RESSD 7.09	ESSD 4.84	6	84 x 10in Riser	RESSD 7.11	ESSD 6.16.18	2	16 x 16 x 18in OSC
RESSD 7.02	ESSD 2.42	4	42 x 30in Wall Panel		ESSD 4.56	2	56 x 10in Riser		ESSD 7.6.8.6R	2	6 x 6 x 8in - 6in Rad ISC
					ESSD 4.36	1	36 x 10in Riser		ESSD 7.6.10	2	6 x 6 x 10in ISC
RESSD 7.01.06	ESSD 2.6	2	6 x 30in Wall Panel		ESSD 4.32	1	32 x 10in Riser	RESSD 7.17	ESSD 7.6.30	2	6 x 6 x 30in ISC
RESSD 7.05	ESSD 3.54	2	54 x 18in Wall Panel					RESSD 7.13	ESSD 8.386.30	2	38x6x30in ISC Riser Side
RESSD 7.04	ESSD 3.48	4	48 x 18in Wall Panel					RESSD 7.19	ESSD 9.10.25	2	14 1/16 x 24 31/32 BO
	ESSD 3.36	1	36 x 18in Wall Panel	RESSD 7.08.06	ESSD 4.6	6	6 x 10in Riser	RESSD 7.20	ESSD 9.10.30	2	14 1/16 x 30 Blockoff
RESSD 7.07	ESSD 3.28	4	28 x 18in Wall Panel		ESSD 5.56	2	56 x 8in Riser				
RESSD 7.06	ESSD 3.26	4	26 x 18in Wall Panel		ESSD 5.36	1	36 x 8in Riser				
					ESSD 5.32	1	32 x 8in Riser				
	ESSD 3.16	4	16 x 18in Wall Panel								
					ESSD 5.16	2	16 x 8in Riser				

per pour  (A)

Qty (30) - Middle Ties & Top - 26" Full Tie

 (B)
Qty (14) - Bottom Ties - 42" Full Tie

NOTE: DIG SUNDECK 18" DEEP ONLY

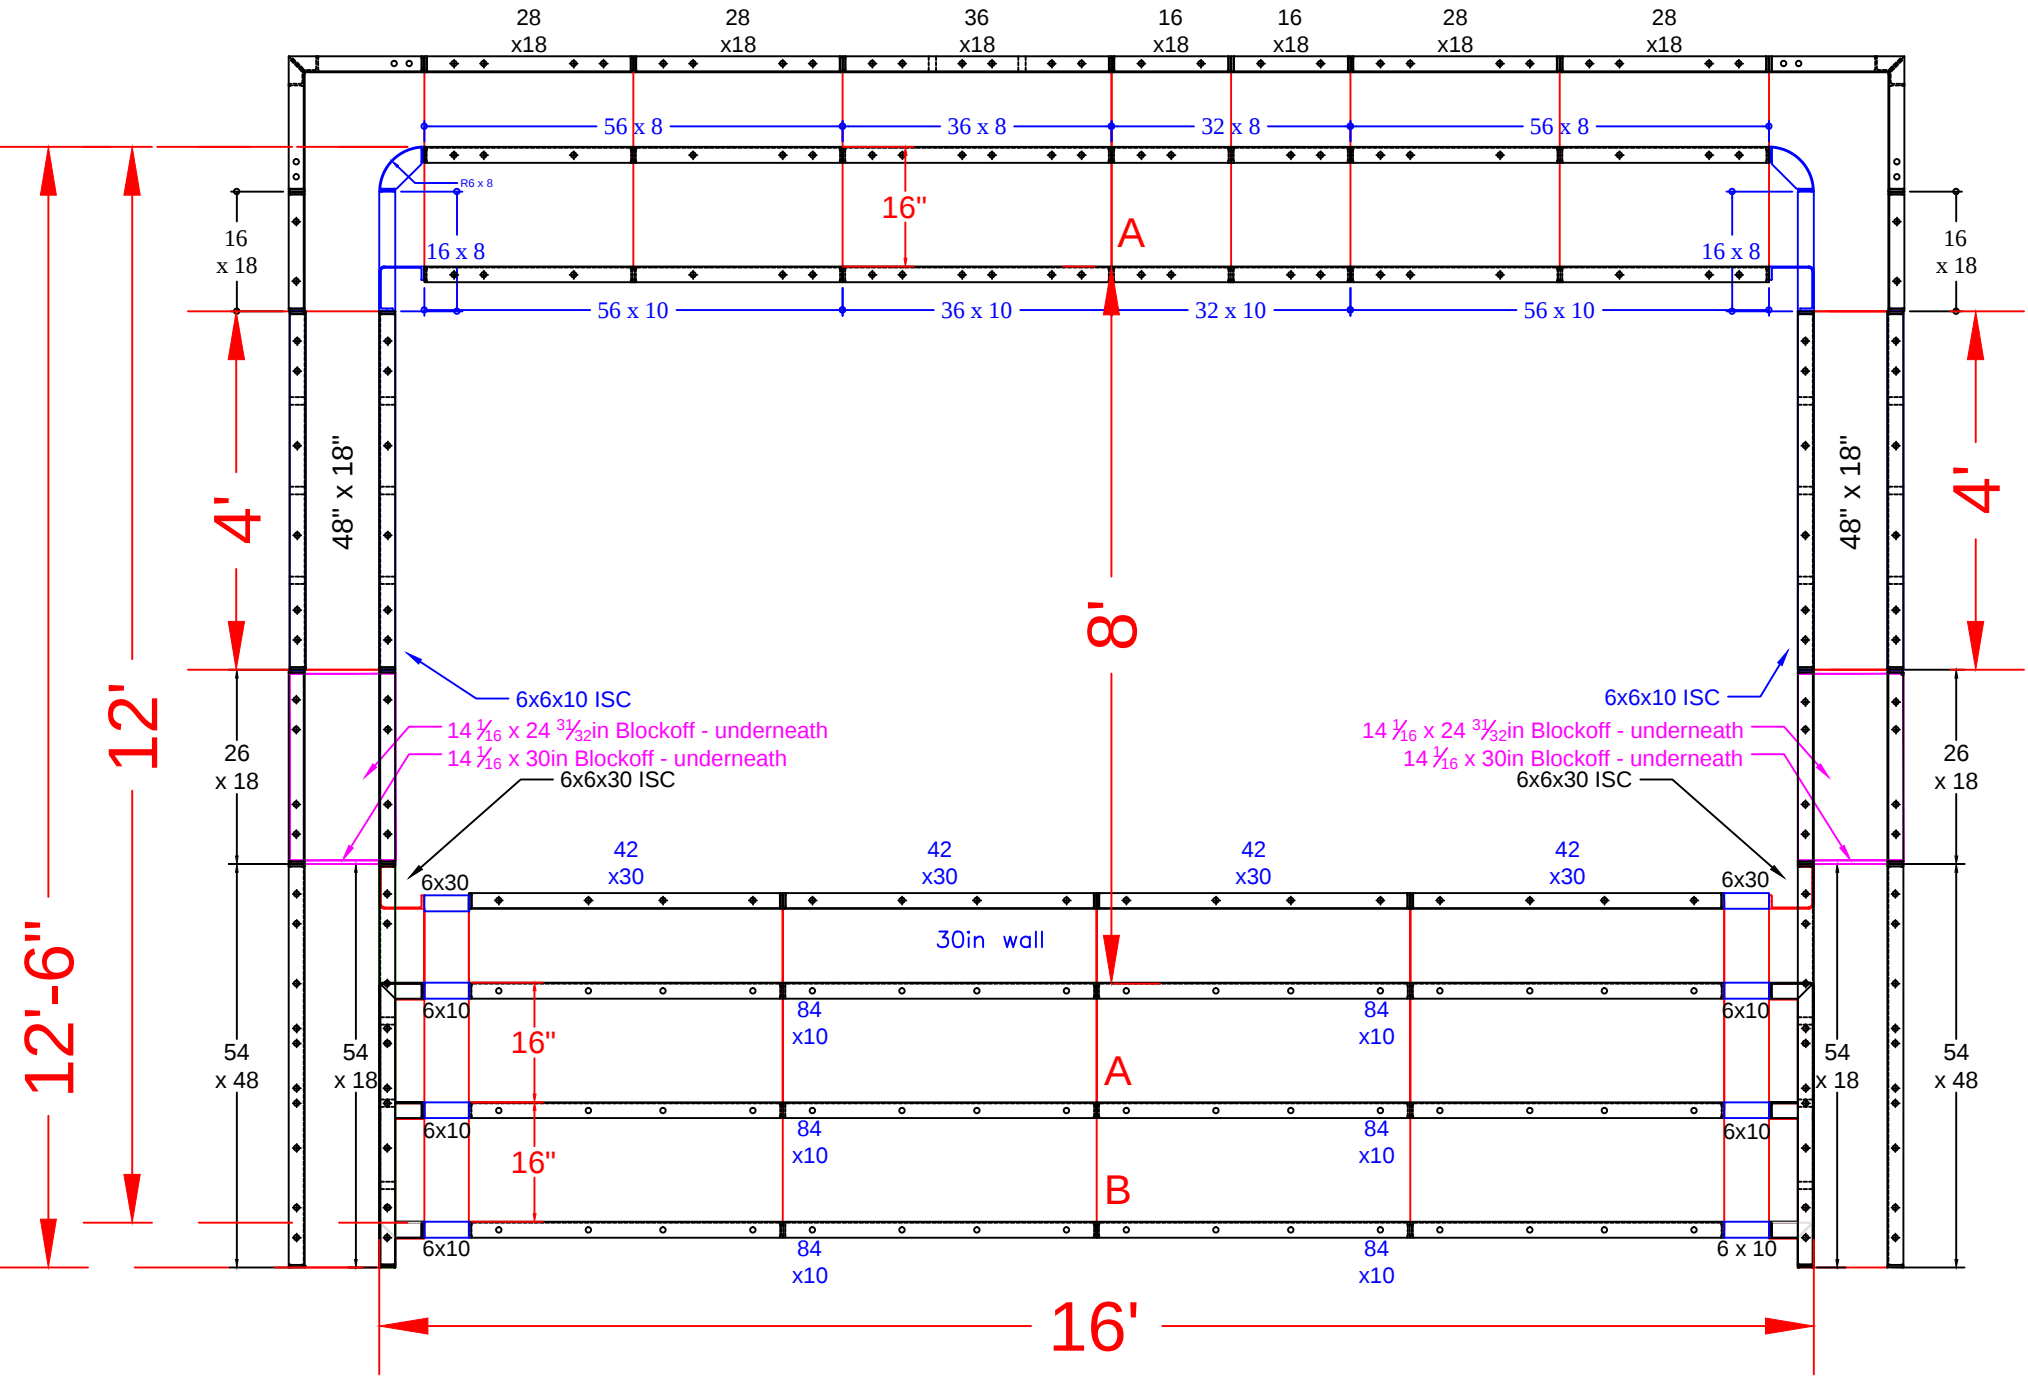

RUIU - 1 Bur Court

16' x 41'-4" - 10" Concrete Wall - Rectangle
w/ 16' x 8' Sun Deck & Entry Step Combo
Pool Perimeter = 114 Ln. Ft.
Pool Area = 661 Sq.Ft.
Approximate Pool Gallons: 16,637 Gallons

Concrete Yards


- Pool Walls, Steps & Spa: 27.5 yards

SUN DECK DETAIL			
JOB #: 2020-1200			
DATE: 1-9-2021			
SCALE: 1' = 1/8 "			
DRAWN BY: SA			







SPA PANEL DETAIL

SPA TIES:

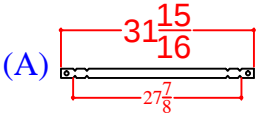

Qty (##) - Set Up - Wall Tie
1/4" BB DRN
Overall Length
#####"

48" Wall Panels on Bottom

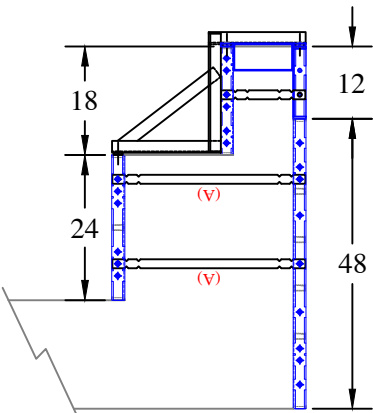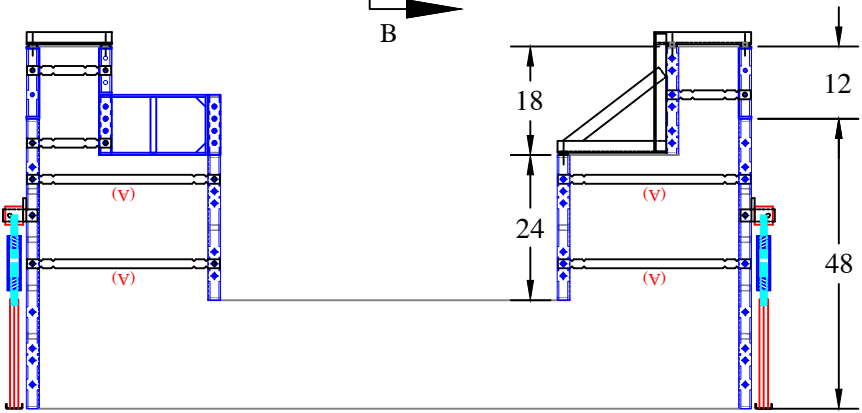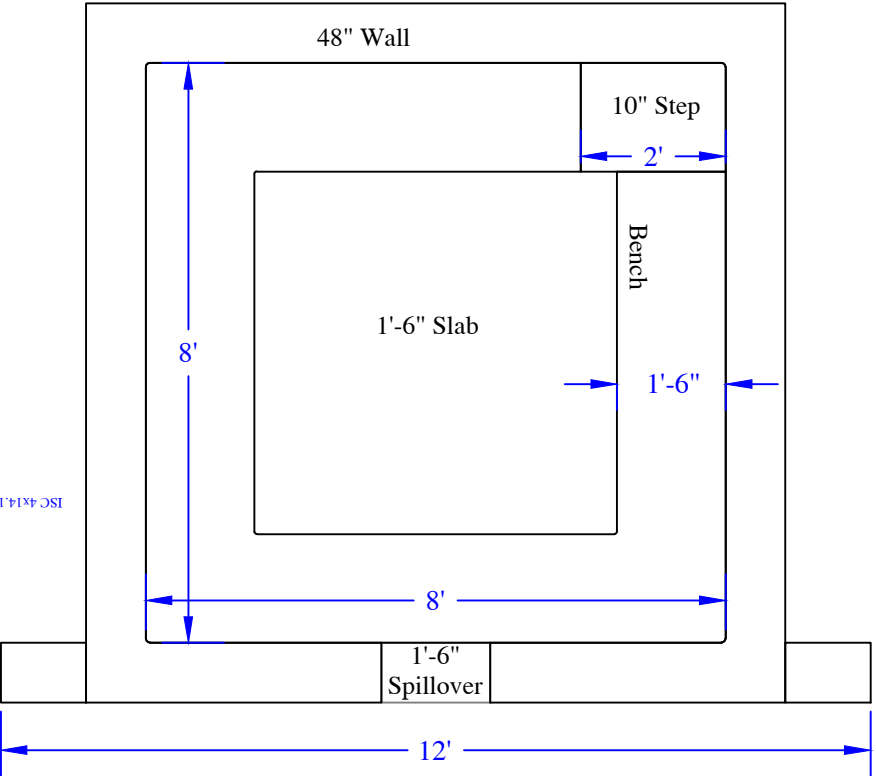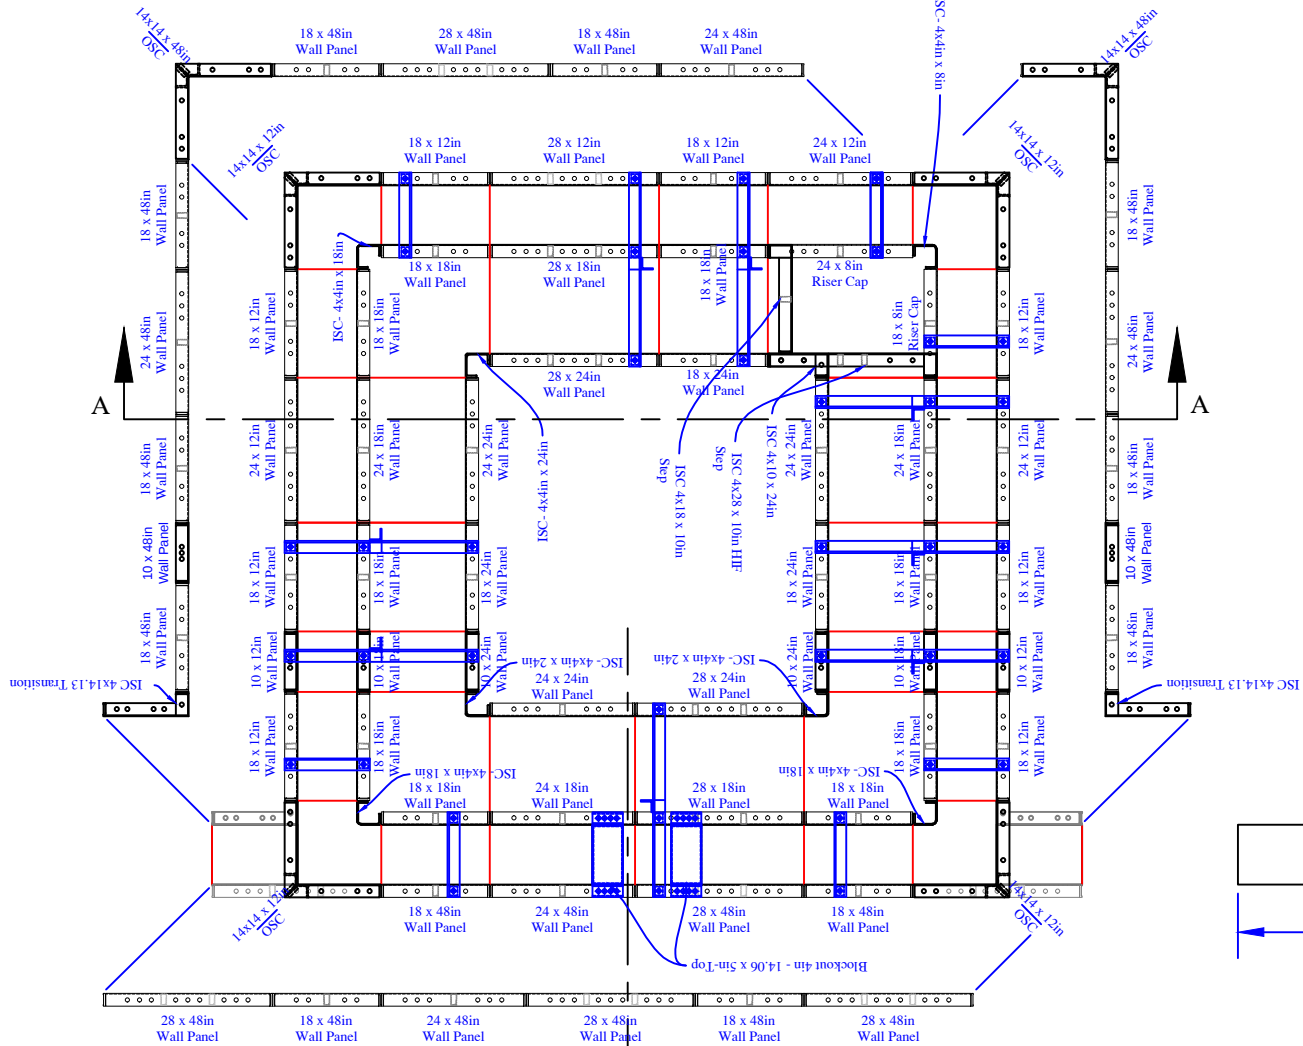

QTY	DESCRIPTION
2	10in x 48in Wall Panel
10	18in x 48in Wall Panel
4	24in x 48in Wall Panel
4	28in x 48in Wall Panel
2	10in x 24in Wall Panel
3	18in x 24in Wall Panel
3	24in x 24in Wall Panel
2	28in x 24in Wall Panel
2	10in x 18in Wall Panel
10	18in x 18in Wall Panel
4	24in x 18in Wall Panel
2	28in x 18in Wall Panel
2	10in x 12in Wall Panel
10	18in x 12in Wall Panel
4	24in x 12in Wall Panel
2	28in x 12in Wall Panel
1	18in x 8in Cap for Risers
1	24in x 8in Cap for Risers
2	4in x 14.125in ISC Transition x 48in
3	4in x 4in ISC x 24in
1	4in x 10in ISC x 24in
3	4in x 4in ISC x 18in
1	4in x 18in ISC x 10in
1	4in x 28in ISC x 10in HIF
1	4in x 4in ISC x 8in
2	14in x 14in OSC x 48in
4	14in x 14in OSC x 12in
2	Blockout 4in - 14 1/16in x 5in

QTY	DESCRIPTION
8	Parapet Brackets - 10in Wall
8	Parapet Bracket - 28in Wall- 18in Bench
4	Wall Leveler - Turnbuckle x 34.5
28	31 15/16" Overall Wall Tie "A"

RUIU - 1 Bur Court

Concrete Yards
- Pool Walls,Steps & Spa: 27.5 yards