
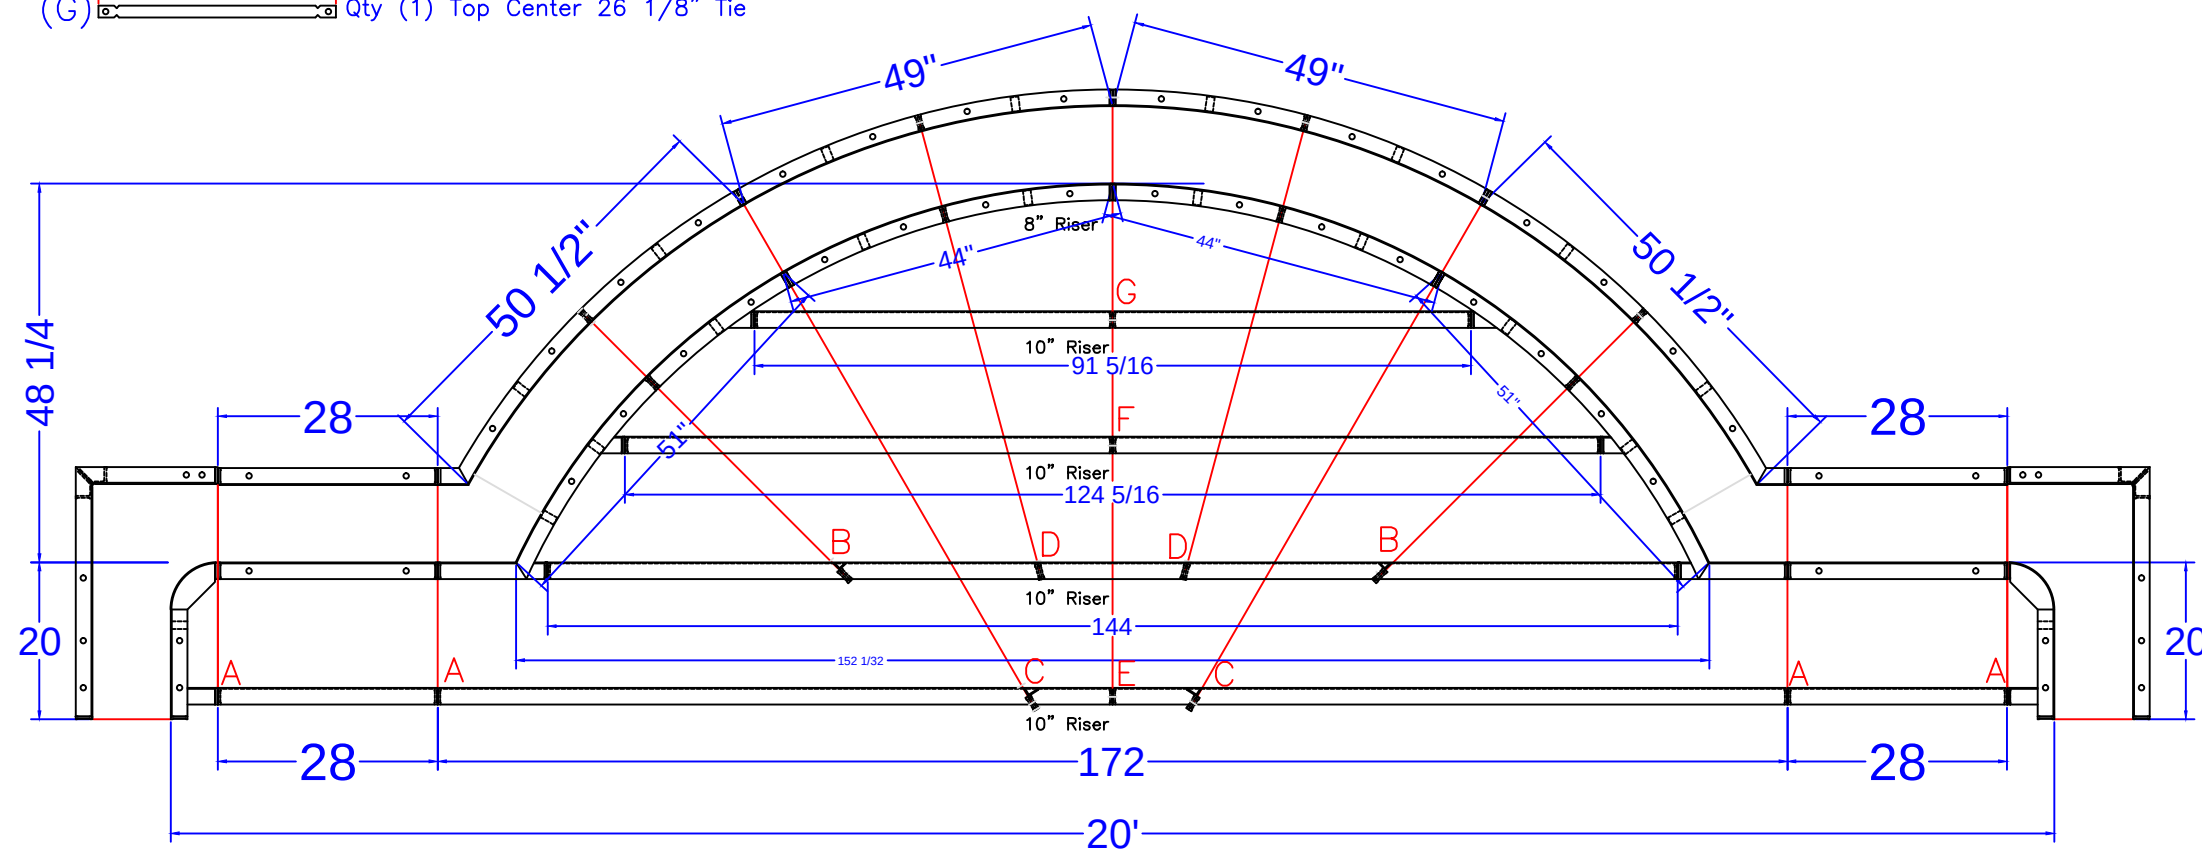


- (A) $29 \frac{15}{16}$ Qty (4) Bottom Sides 26" Full Tie
- (B) $48 \frac{11}{16}$ Qty (2) 2nd Bottom Sides $43 \frac{5}{16}$ " Tie
- (C) $76 \frac{9}{32}$ Qty (2) Bottom Middle $71 \frac{1}{16}$ " Tie
- (D) $61 \frac{3}{32}$ Qty (2) 2nd Bottom Middle $56 \frac{7}{8}$ " Tie
- (E) $78 \frac{1}{4}$ Qty (2) Bottom Center $74 \frac{1}{8}$ " Tie
- (F) $46 \frac{1}{4}$ Qty (1) 2nd Top Center $42 \frac{1}{8}$ " Tie
- (G) $30 \frac{1}{4}$ Qty (1) Top Center $26 \frac{1}{8}$ " Tie

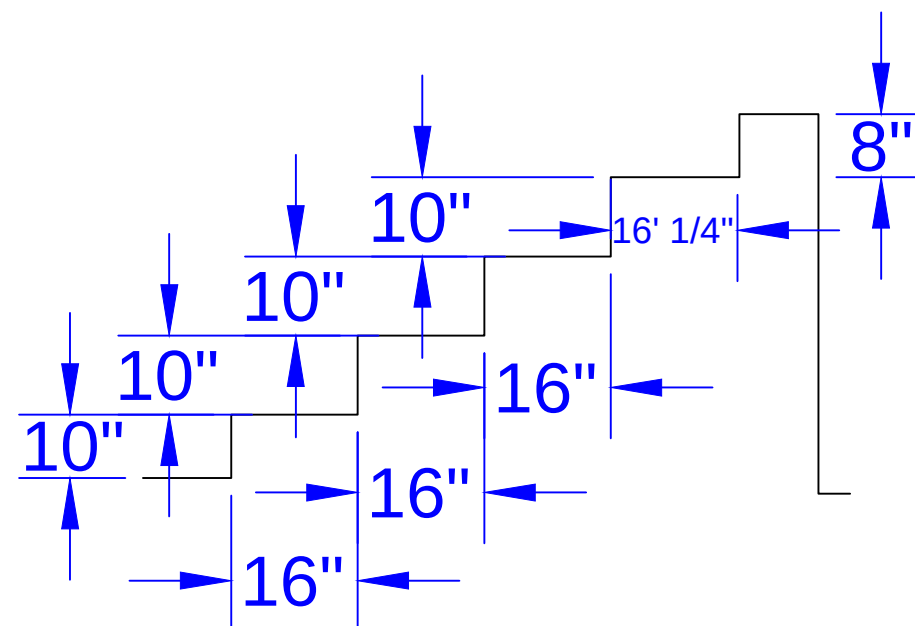

STEP PANEL DESCRIPTIONS

7' RADIUS ROMAN END STEP WITH 8" AND 10" RISERS	
QTY.	DESCRIPTION
2	6 x 20 x 48 ISC Riser Side
2	16 x 30 x 48 OSC Form
2	51 x 4 x 38 84R ISC Zee Riser Side
2	50 1/2 x 4 x 48 94 RADIUS OS Panel
2	44 x 8 84 RADIUS IS Panel Top Riser
2	49 x 48 94 RADIUS OS Panel
3	Risers - Top Center (1)91 5/16, (2)62 5/32
3	Risers - Bottom Center (1)144, (2)86
2	Risers - Bottom Outer Edge
2	28 x 48 Straight Panel
2	28 x 38 Straight Panel
2	28 x 10 Straight Panel

CERULLO- 15 Weathersfield Drive

20' x 42' - 10" Concrete Wall

w/ Vinyl Covered Steps

Pool Perimeter = 114'

Pool Area = 753 S. F.

Approximate Gallons of Pool: 28,000 Gallons

Concrete Yards

- Pool Walls & Steps: 20.5 yards (19.4 exact)

Pool Perimeter = 114'

Pool Area = 753 SQ. FT.

STEP DETAIL

JOB #: 555212
DATE: 1-12-2017
DRAWN BY: SA



SEASONAL WORLD
WE BUILD BACKYARDS!