

per pour (A)


Qty (14) - Middle Ties - 26" Full Tie

(B)

Qty (14) - Bottom Ties - 42" Full Tie

(C)

Qty (1) - Top Center 26 1/8" Tie

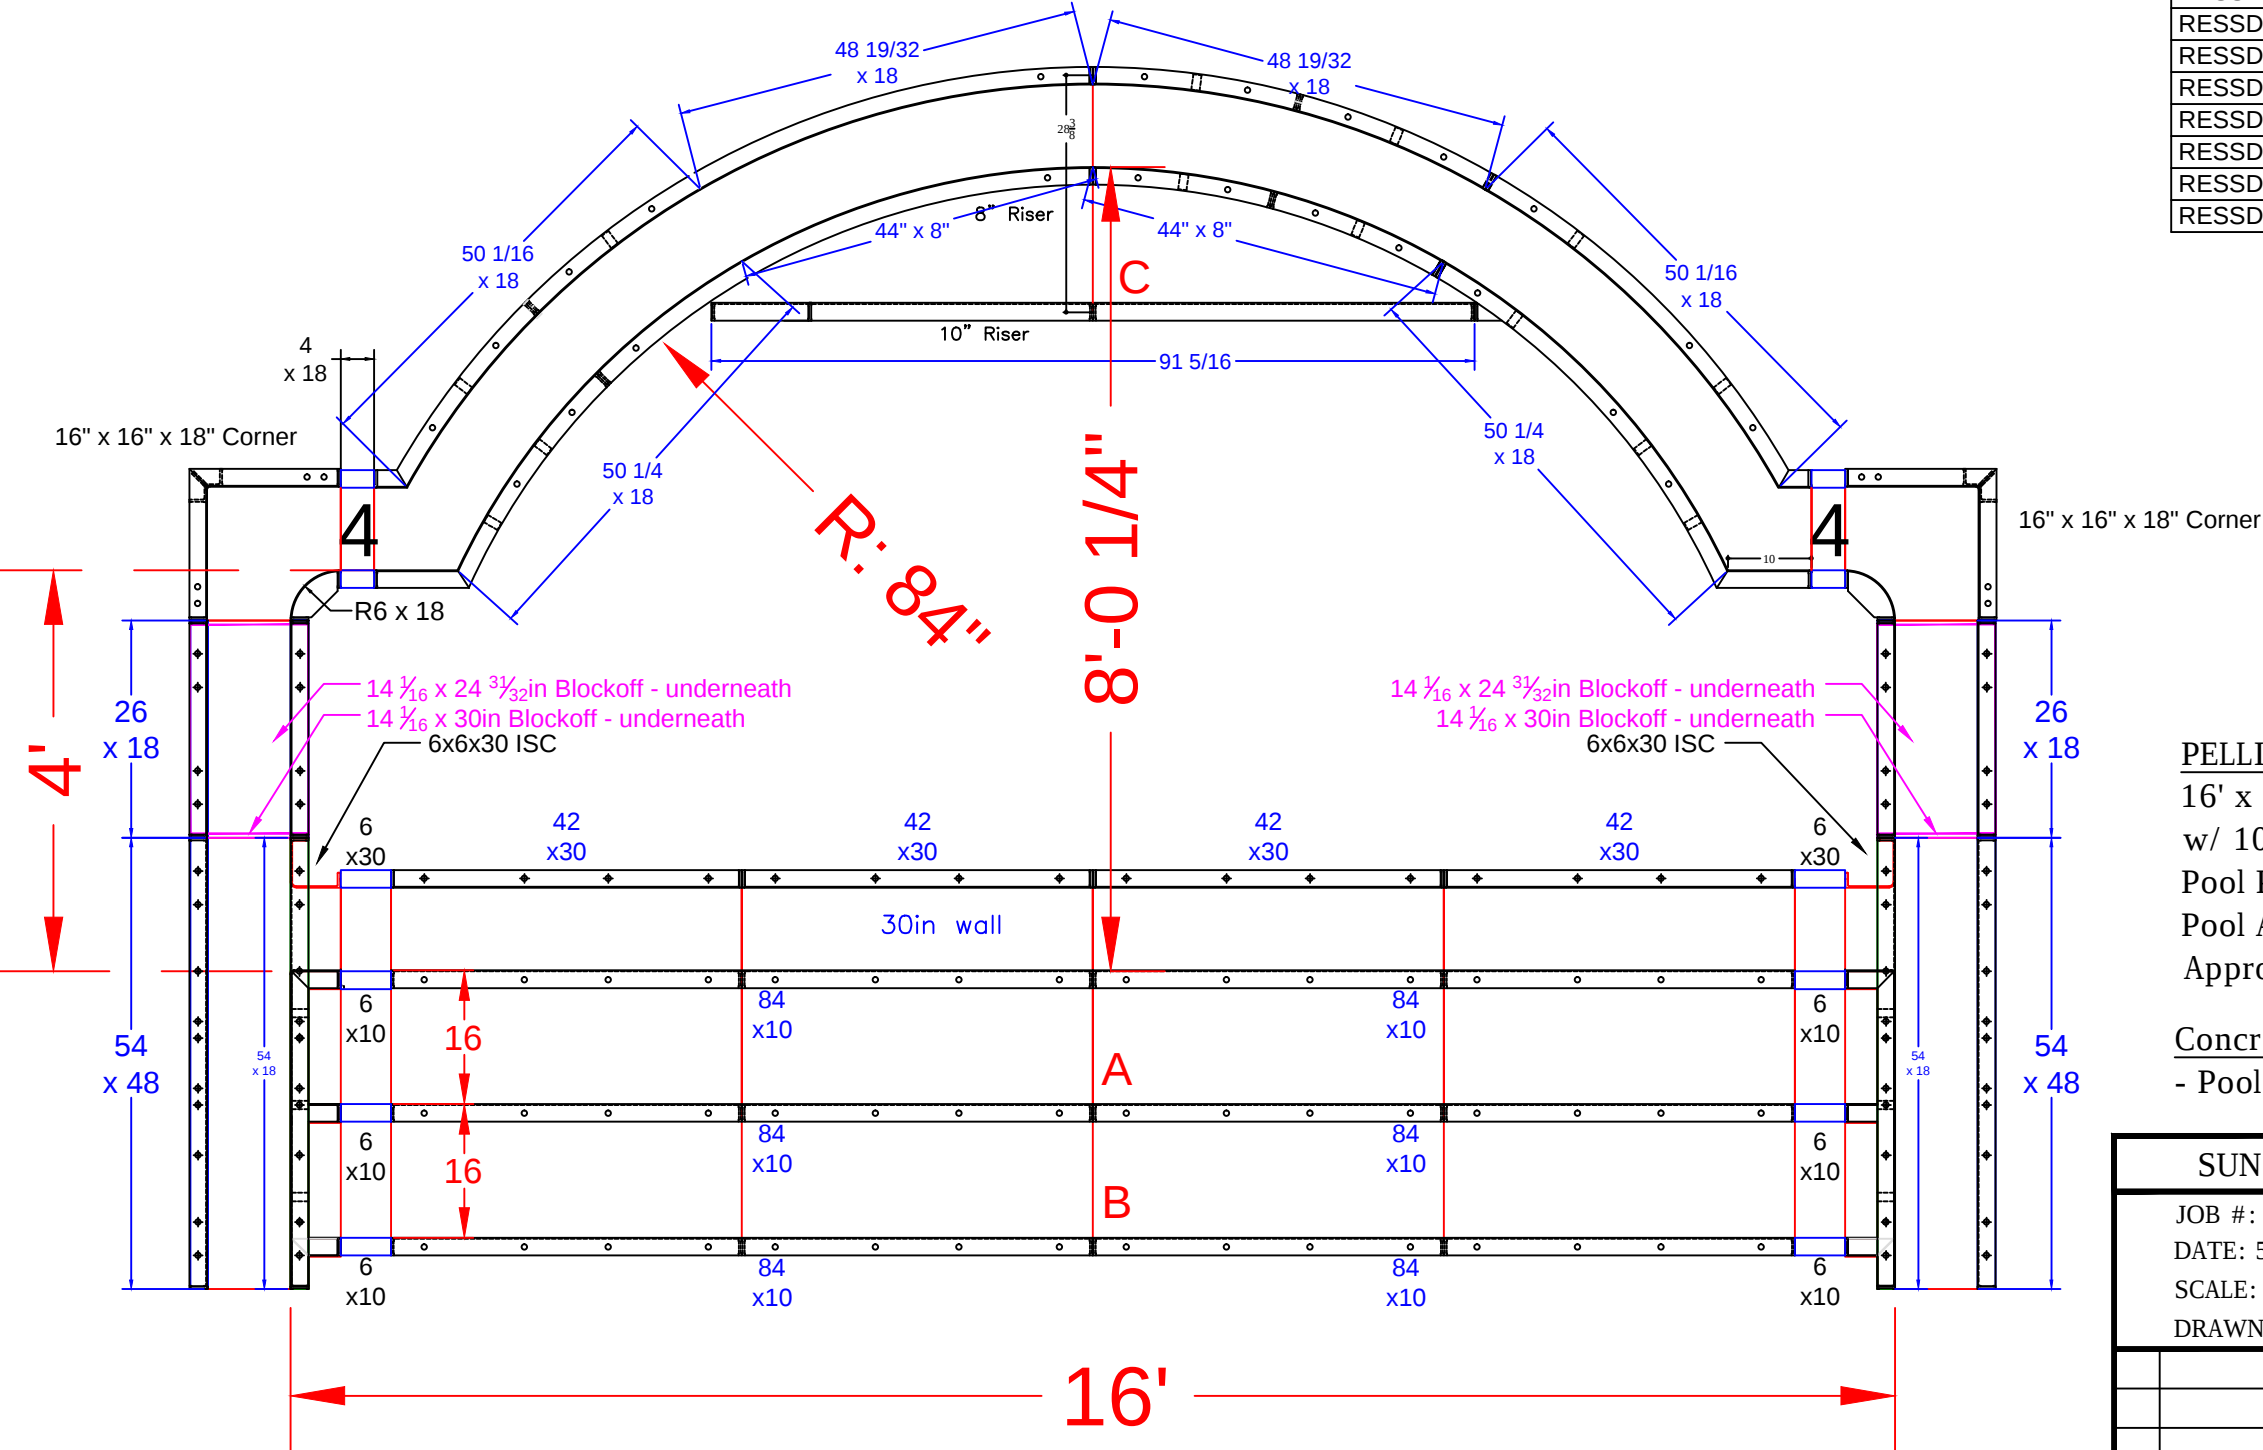

print #	QTY.	DESCRIPTION
RESSD 7.03	2	54 x 48 Wall Panel
RESSD 7.05	2	54 x 18 Wall Panel
RESSD 7.06	4	26 x 18 Wall Panel
RESSD 7.02	4	42 x 30 Wall Panel
	2	6 x 30 Wall Panel
	6	6 x 10 Riser
RESSD 7.09	6	84 x 10 Riser
RESSD 7.10	2	51 x 18 84R ISC Riser Side
RESSD 7.11	2	16x16x18 Outside Corner
RESSD 7.12	2	44 x 8 84R IS Panel Top Riser
RESSD 7.13	2	38x6x30 ISC Riser Side
RESSD 7.14	2	51 1/2 x 4 x 18 96R OS Panel
RESSD 7.16	1	91 5/16 x 10 Riser-2nd Top
RESSD 7.17	2	6x6x30 ISC
RESSD 7.18	2	6x6x18 6R Inside Corner
RESSD 7.19	2	14 1/16 x 24 31/32 Blockoff
RESSD 7.20	2	14 1/16 x 30 Blockoff

PELLICCIA - 78 Station Road
16' x 32' - 10" Concrete Wall - Freeform
w/ 10' x 18' Vinyl Covered Sun Deck
Pool Perimeter = 107'
Pool Area = 627 S. F.
Approximate Gallons of Pool: 17,000 Gallons

Concrete Yards
- Pool Walls & Steps: 17.5 yards (16.4 exact)

SUN DECK DETAIL			
JOB #: 555117			
DATE: 5-27-2016			
SCALE: 1' = 1/2 "			
DRAWN BY: SA			



SEASONAL WORLD
WE BUILD BACKYARDS!