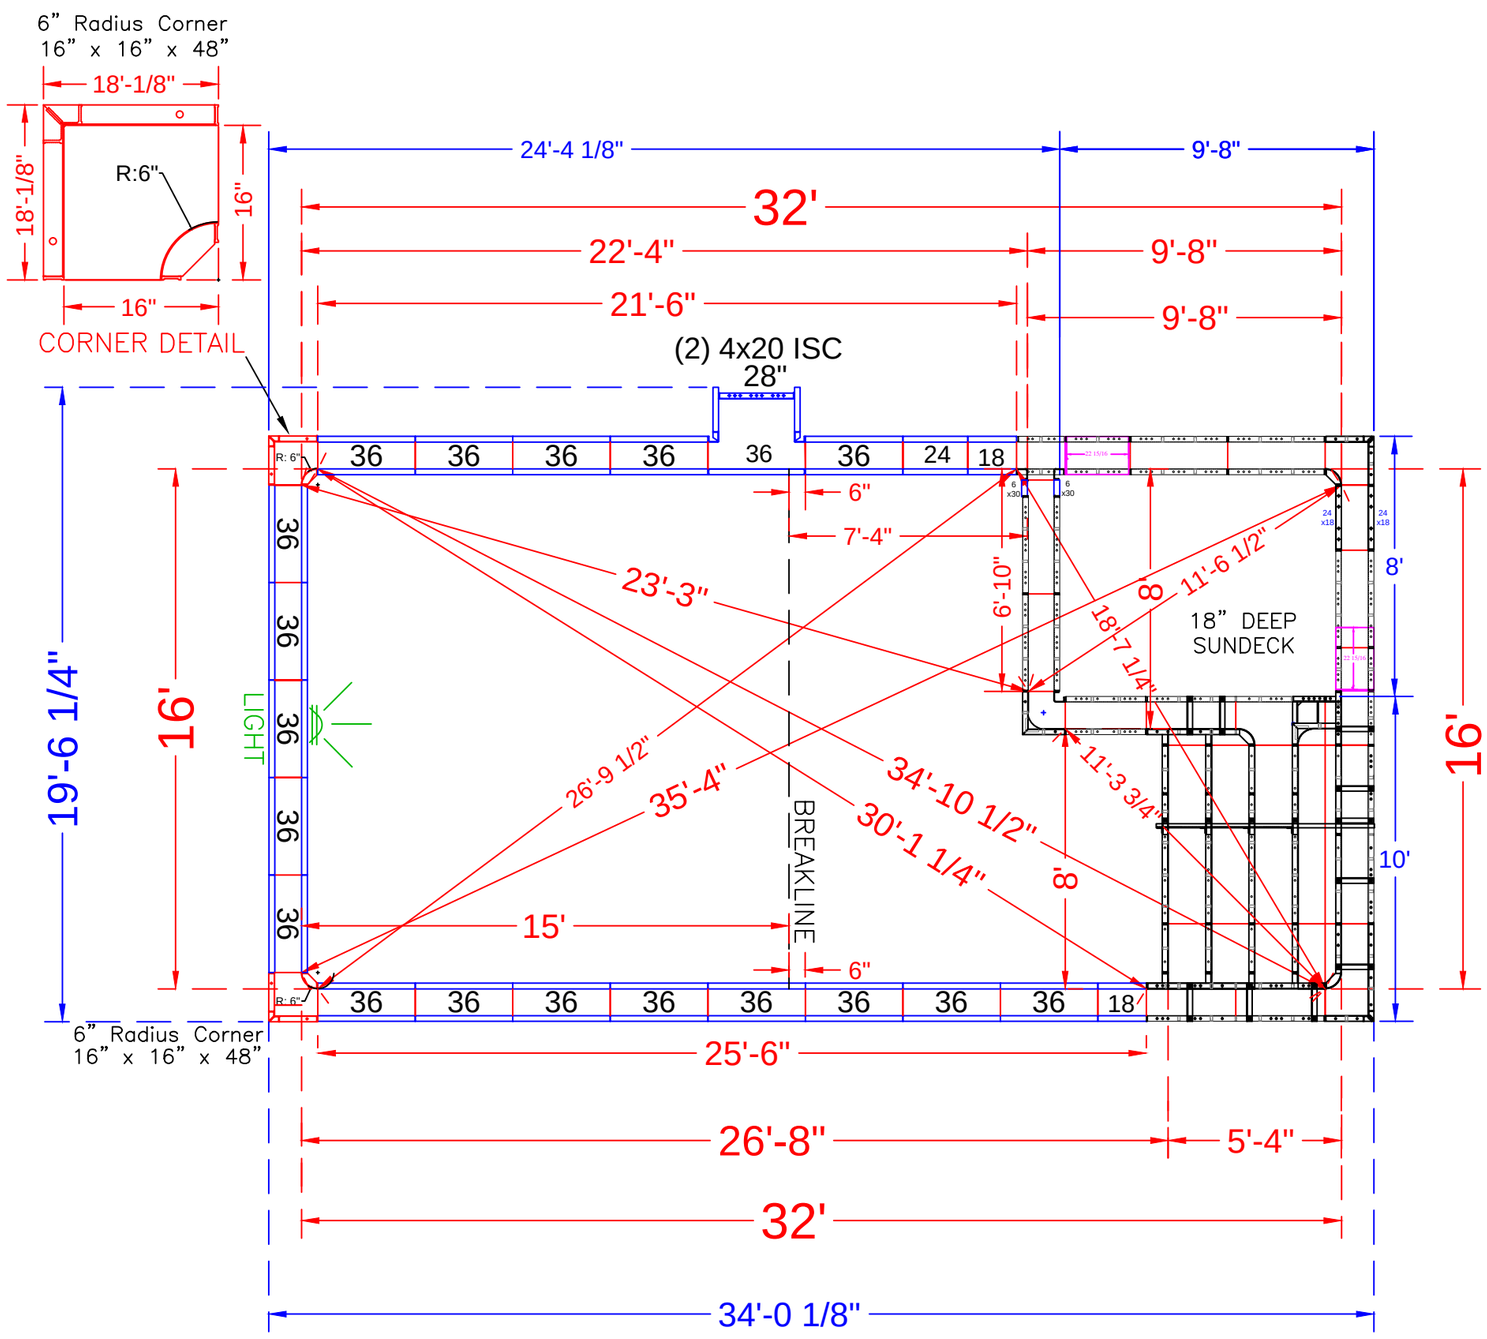

NOTE: SEE CONSTRUCTION PLANS FOR POOL LOCATION

POOL PANEL DESCRIPTIONS

	QTY.	DESCRIPTION
SEE DETAIL PAGE {	1	16' Wide Rectangle Sundeck & Step Assembly(Yellow paint)
		CORNER PANELS
	2	16" x 16" x 48 w/ Outside Corner-SA (6" Radius)
SKIMMER SIDES {	2	20" x 4" x 48" Adj Offset Hinged ISC (Pilaster)
		STRAIGHT PANELS
	4	18" x 48" Panel-SA
	2	24" x 48" Panel-SA
SKIMMER {	1	28" x 48" Panel-SA
	37	36 x 48" Panel-SA

COLLASO - 1694 George Street

16' x 32' - 10" Concrete Wall - Rectangle
w/ Interior Vinyl Covered Entry Step /
Sun Deck Combo
Pool Perimeter = 95 Ln. Ft.
Pool Area = 511 Sq. Ft.
Approximate Pool Gallons: 13,800 Gallons

Concrete Yards
- Pool Walls & Steps: 17.5 yards

PANEL LAYOUT

JOB #: 555604
DATE: 12-17-2021
DRAWN BY: SA

REVISIONS		

SEASONAL WORLD
WE BUILD BACKYARDS!

9	Parapet Brackets - 10in Wall
1	Parapet Brackets - 64in Wall
2	26" Full Wall Tie "A"- 2nd Top Rise
2	42" Full Wall Tie "B"- 3rd Top Rise
2	74" Full Wall Tie "C"- Bottom Rise
1	115 3/4" Wall Tie "D"- Bottom Wall

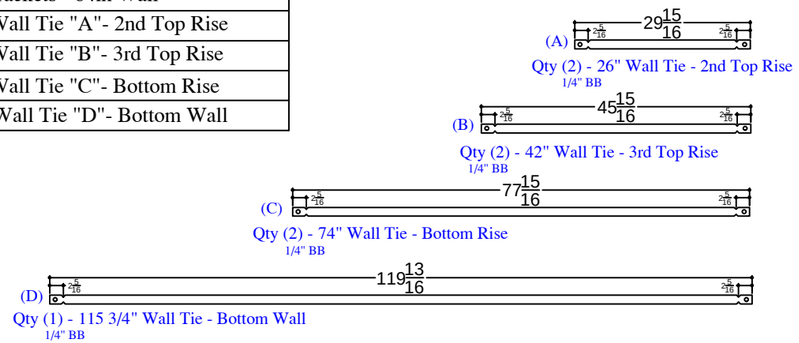

QTY	DESCRIPTION
1	16in x 34in OSC x 48in
1	14in x 14in OSC 6in Rad. x 30in
1	16in x 16in OSC x 18in
1	6in x 24in ISC 6in R Riser x 8in - Top
1	66in x 8in Riser Panel - Top
1	20in x 16in x 18in Z-L Riser OSC 6in R
1	66in x 18in 6in ISC Riser Side
1	40in x 30in 6in ISC Riser Side
1	40in x 30in 6in Rad ISC Riser Side
4	84in x 10in Riser Panel
2	14 1/16in x 22.9in Blockoff
2	14 1/16in x 30in Blockoff

QTY	DESCRIPTION
1	18in x 48in Wall Panel
1	20in x 48in Wall Panel
2	66in x 48in Wall Panel
2	6in x 30in Wall Panel
2	30in x 30in Wall Panel
4	36in x 30in Wall Panel
1	66in x 30in Wall Panel
2	16in x 18in Wall Panel
1	18in x 18in Wall Panel
4	24in x 18in Wall Panel
6	36in x 18in Wall Panel
3	4in x 4in ISC x 30in
1	6in x 4in ISC x 30in
1	9.4in ISC 6in Rad. x 18in

NOTE: Panels are painted yellow

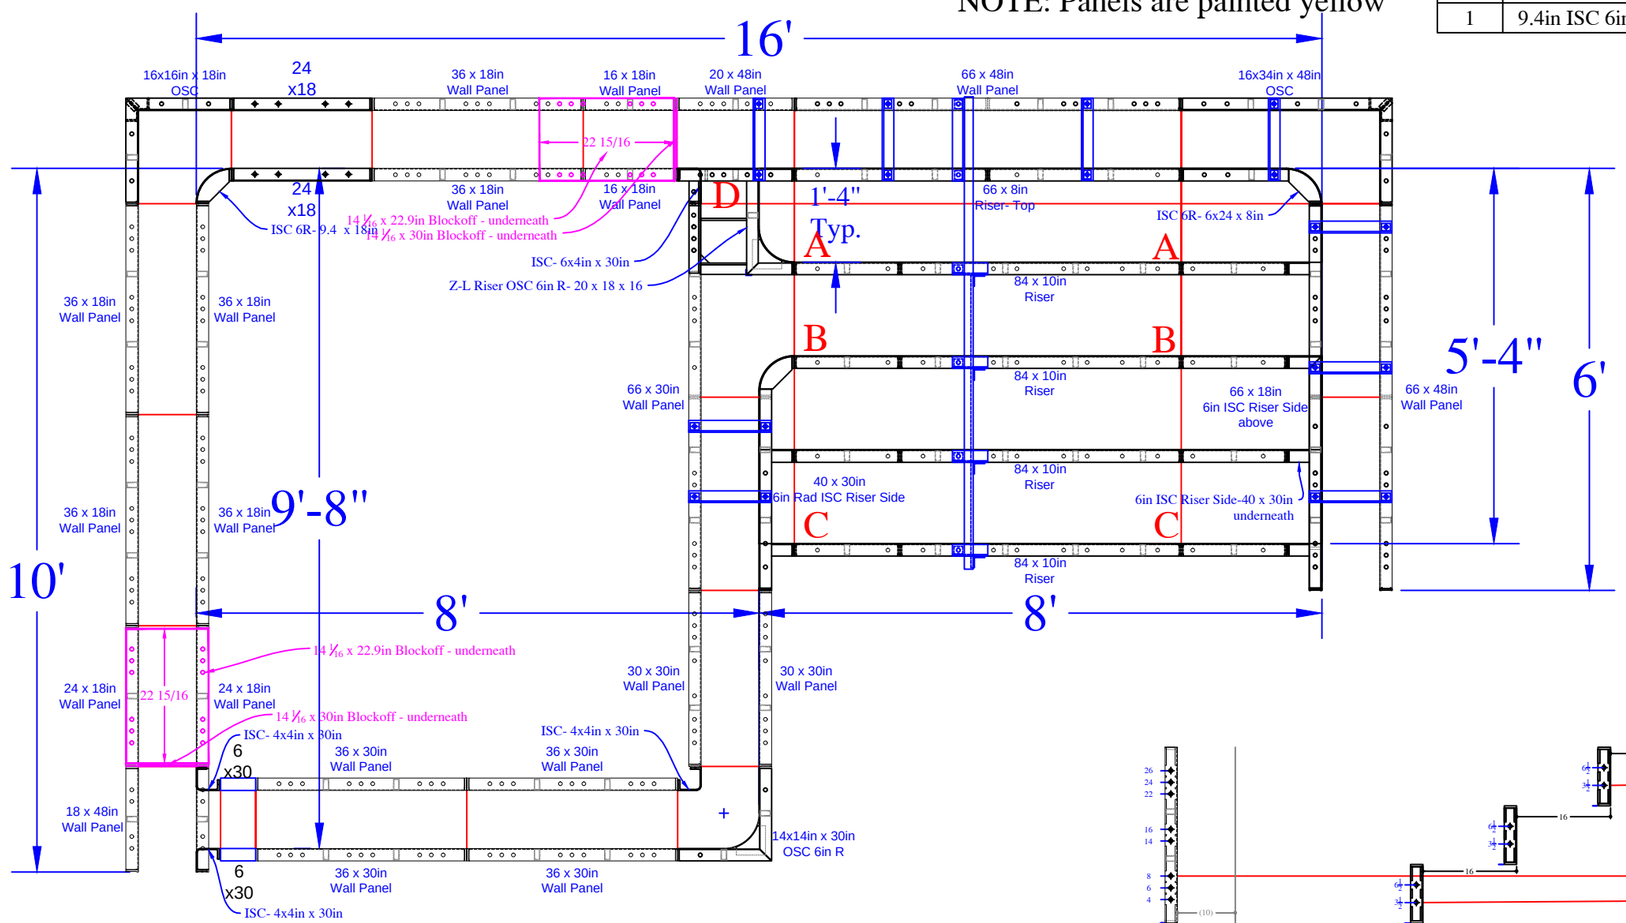

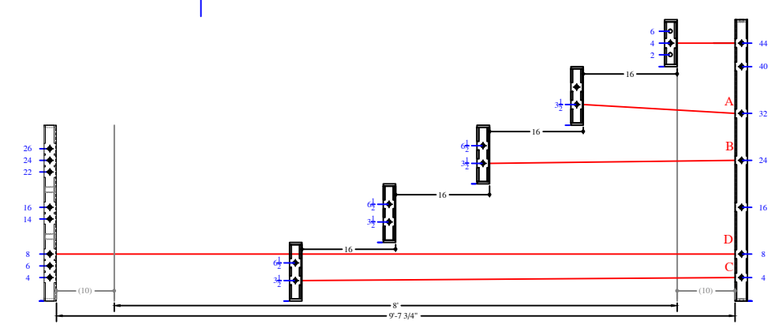

SEASONAL WORLD	SUNDECK DETAIL	**COLLASO - 1694 George Street**	JOB #: 555604
DWG BY: SA	SCALE:	Concrete Yards: 17.5 yards	
DATE: 12/17/21	PAGE:		