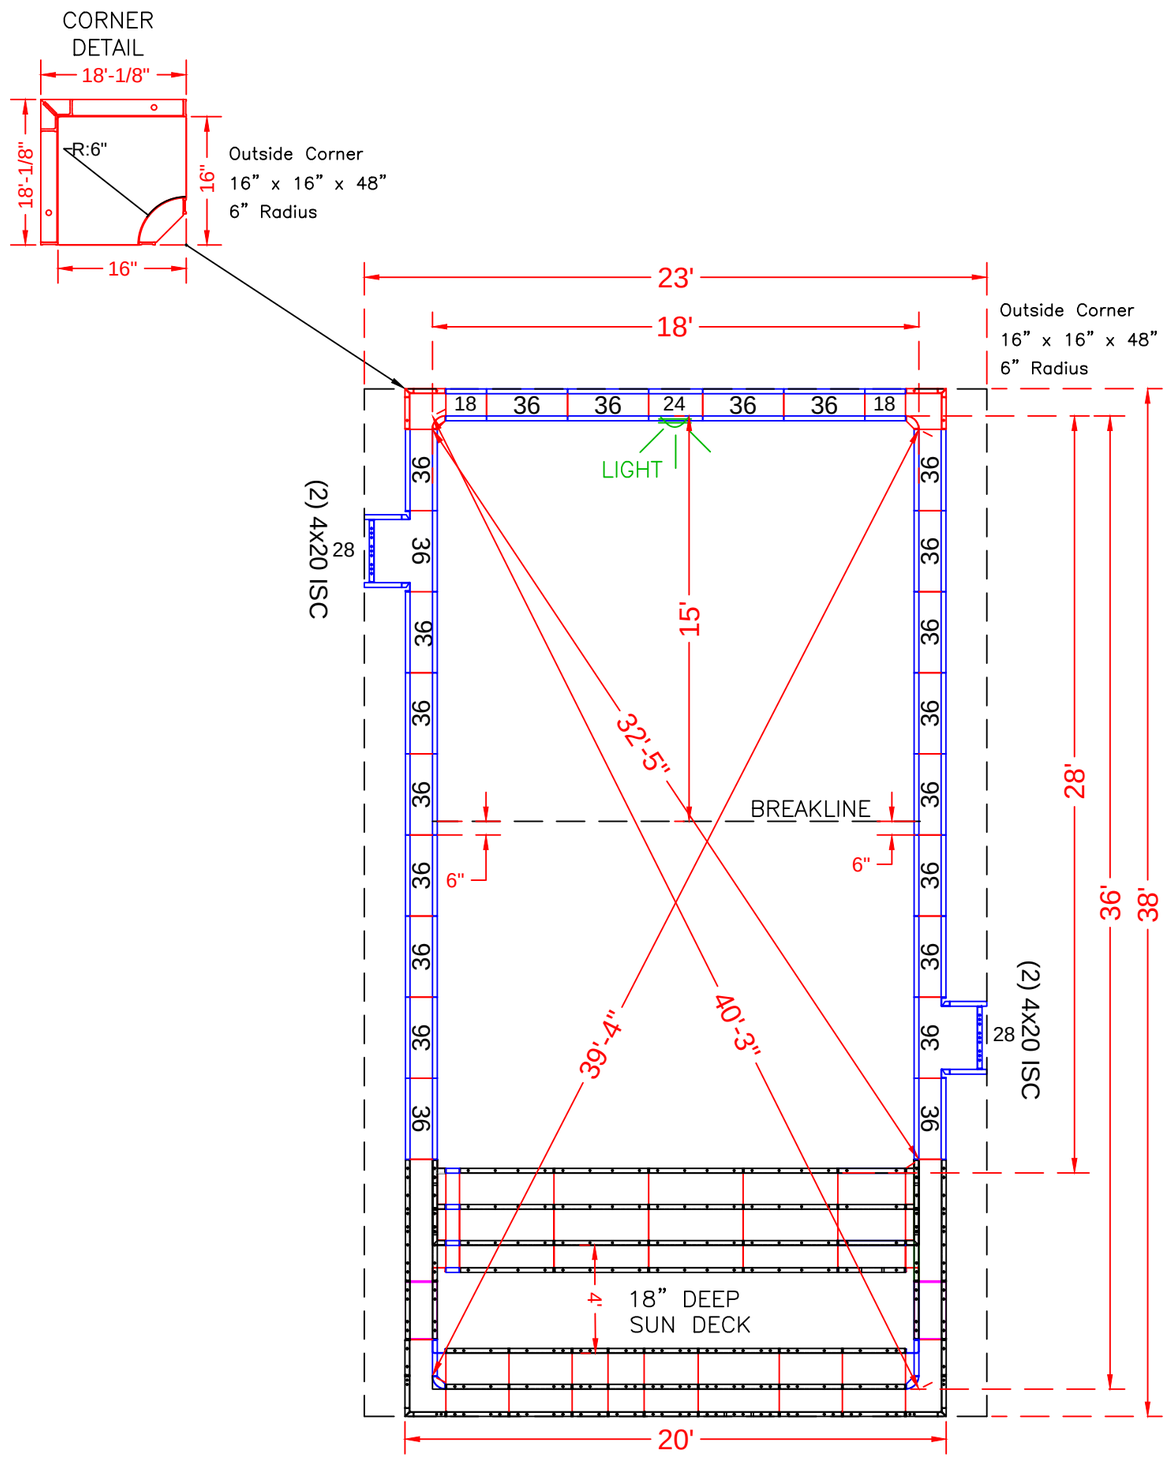

POOL PANEL DESCRIPTIONS

	QTY.	DESCRIPTION
Skimmer Sides }	4	4" x 20" x 48" Adj Offset Hinged ISC (Pilaster)
Skimmers }	2	28" x 48" Panel-SA
See Detail Page }	1	18' Wide Sun Deck Assembly
		Corner Panels
	2	16" x 16" w/ 6" Radius Inside Corner-SA
		Straight Panels
	4	18" x 48" Panel
	2	24" x 48" Panel
	42	36" x 48" Panel

MANRIQUE - 15 Kennedy Boulevard

18' x 36' - 10" Concrete Wall - Rectangle
w/ 18' Wide Vinyl Covered Sun Deck / Steps
Pool Perimeter = 107'
Pool Area = 648 S. F.
Approximate Gallons of Pool: 18,530 Gallons

Concrete Yards
- Pool Walls & Sundeck: 17.5 yards (16.25 exact)

PANEL LAYOUT

JOB #: 500426
DATE: 11-04-2014
SCALE: N.T.S.
DRAWN BY: SA

REVISIONS		

SEASONAL WORLD
WE BUILD BACKYARDS!

print #	print #	QTY.	DESCRIPTION	print #	print #	QTY.	DESCRIPTION	print #	print #	QTY.	DESCRIPTION
RESSD 7.03	ESSD 1.54	2	54 x 48in Wall Panel	RESSD 7.09	ESSD 4.84	6	84 x 10in Riser	RESSD 7.11	ESSD 6.16.18	2	16 x 16 x 18in OSC
RESSD 7.02	ESSD 2.42	4	42 x 30in Wall Panel		ESSD 4.56	2	56 x 10in Riser		ESSD 7.6.8.6R	2	6 x 6 x 8in - 6in Rad ISC
RESSD 7.01	ESSD 2.30	1	30 x 30in Wall Panel		ESSD 4.36	1	36 x 10in Riser		ESSD 7.6.10	2	6 x 6 x 10in ISC
RESSD 7.01.06	ESSD 2.6	1	6 x 30in Wall Panel		ESSD 4.32	1	32 x 10in Riser	RESSD 7.17	ESSD 7.6.30	2	6 x 6 x 30in ISC
RESSD 7.05	ESSD 3.54	2	54 x 18in Wall Panel	RESSD 7.08	ESSD 4.30	3	30 x 10in Riser	RESSD 7.13	ESSD 8.386.30	2	38x6x30in ISC Riser Side
					ESSD 4.24	1	24 x 10in Riser	RESSD 7.19	ESSD 9.10.25	2	14 1/16 x 24 31/32 BO
	ESSD 3.36	1	36 x 18in Wall Panel	RESSD 7.08.06	ESSD 4.6	3	6 x 10in Riser	RESSD 7.20	ESSD 9.10.30	2	14 1/16 x 30 Blockoff
RESSD 7.07	ESSD 3.28	4	28 x 18in Wall Panel		ESSD 5.56	2	56 x 8in Riser				
RESSD 7.06	ESSD 3.26	4	26 x 18in Wall Panel		ESSD 5.36	1	36 x 8in Riser				
	ESSD 3.24	2	24 x 18in Wall Panel		ESSD 5.32	1	32 x 8in Riser				
	ESSD 3.16	4	16 x 18in Wall Panel		ESSD 5.24	1	24 x 8in Riser				
					ESSD 5.16	2	16 x 8in Riser				

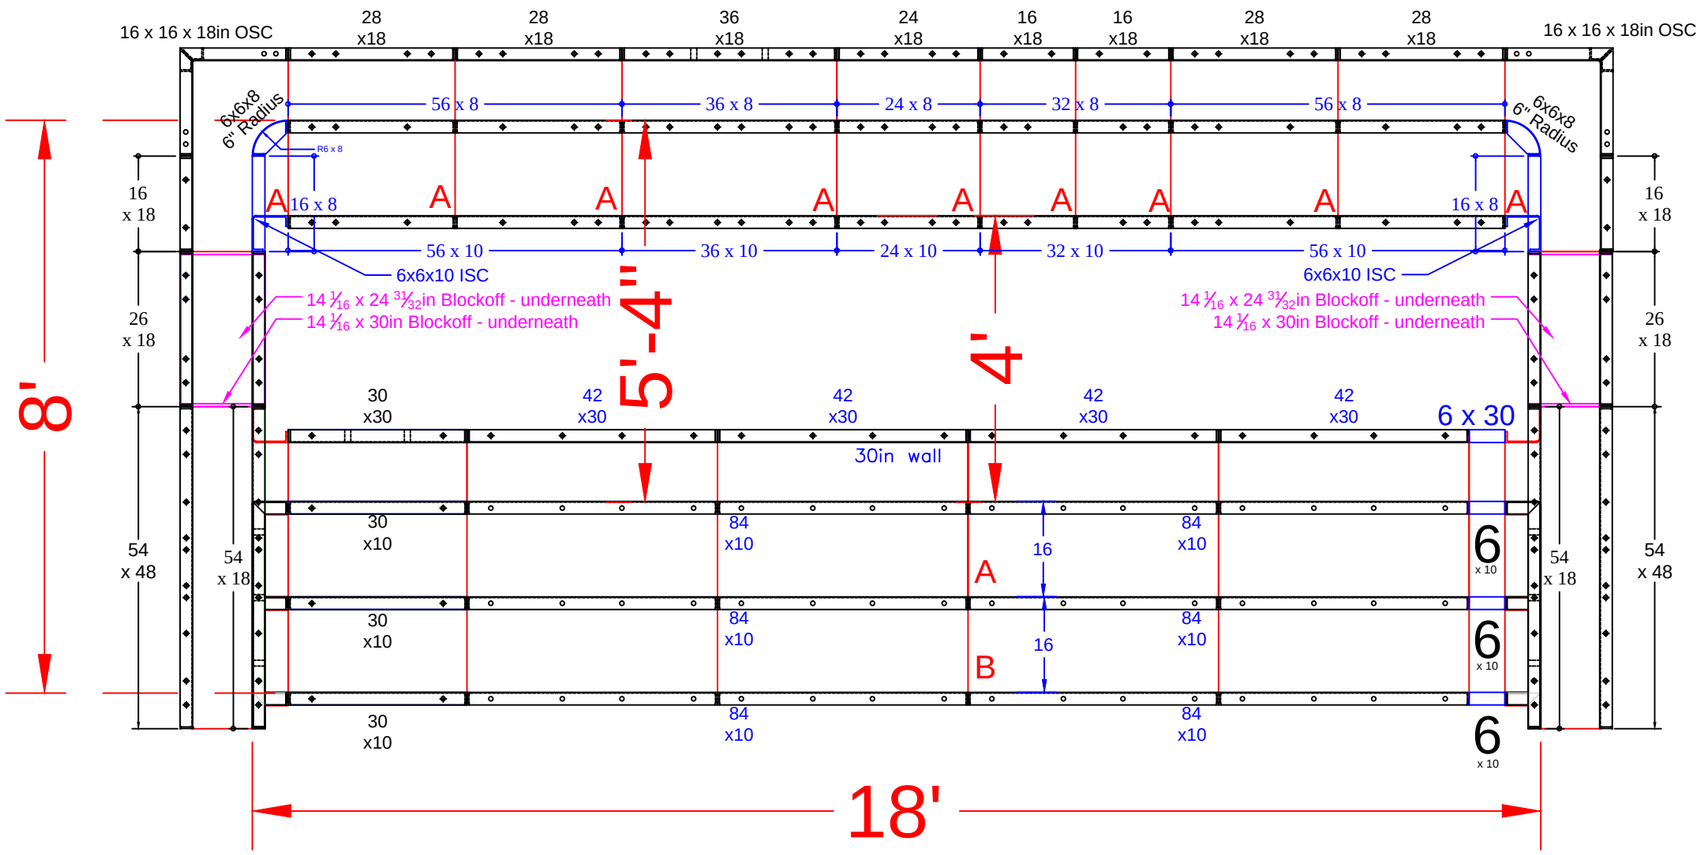

per pour

Qty (32) - Middle Ties - 26" Full Tie



Qty (14) - Bottom Ties - 42" Full Tie



MANRIQUE - 15 Kennedy Boulevard

18' x 36' - 10" Concrete Wall - Rectangle
w/ 18' Wide Vinyl Covered Sun Deck / Steps
Pool Perimeter = 107'
Pool Area = 648 S. F.
Approximate Gallons of Pool: 18,530 Gallons

Concrete Yards
- Pool Walls & Sundeck: 17.5 yards (16.25 exact)

SUN DECK DETAIL

JOB #: 500426
DATE: 11-03-2014
SCALE: 1' = 1/6 "
DRAWN BY: SA & LH

SEASONAL WORLD
WE BUILD BACKYARDS!