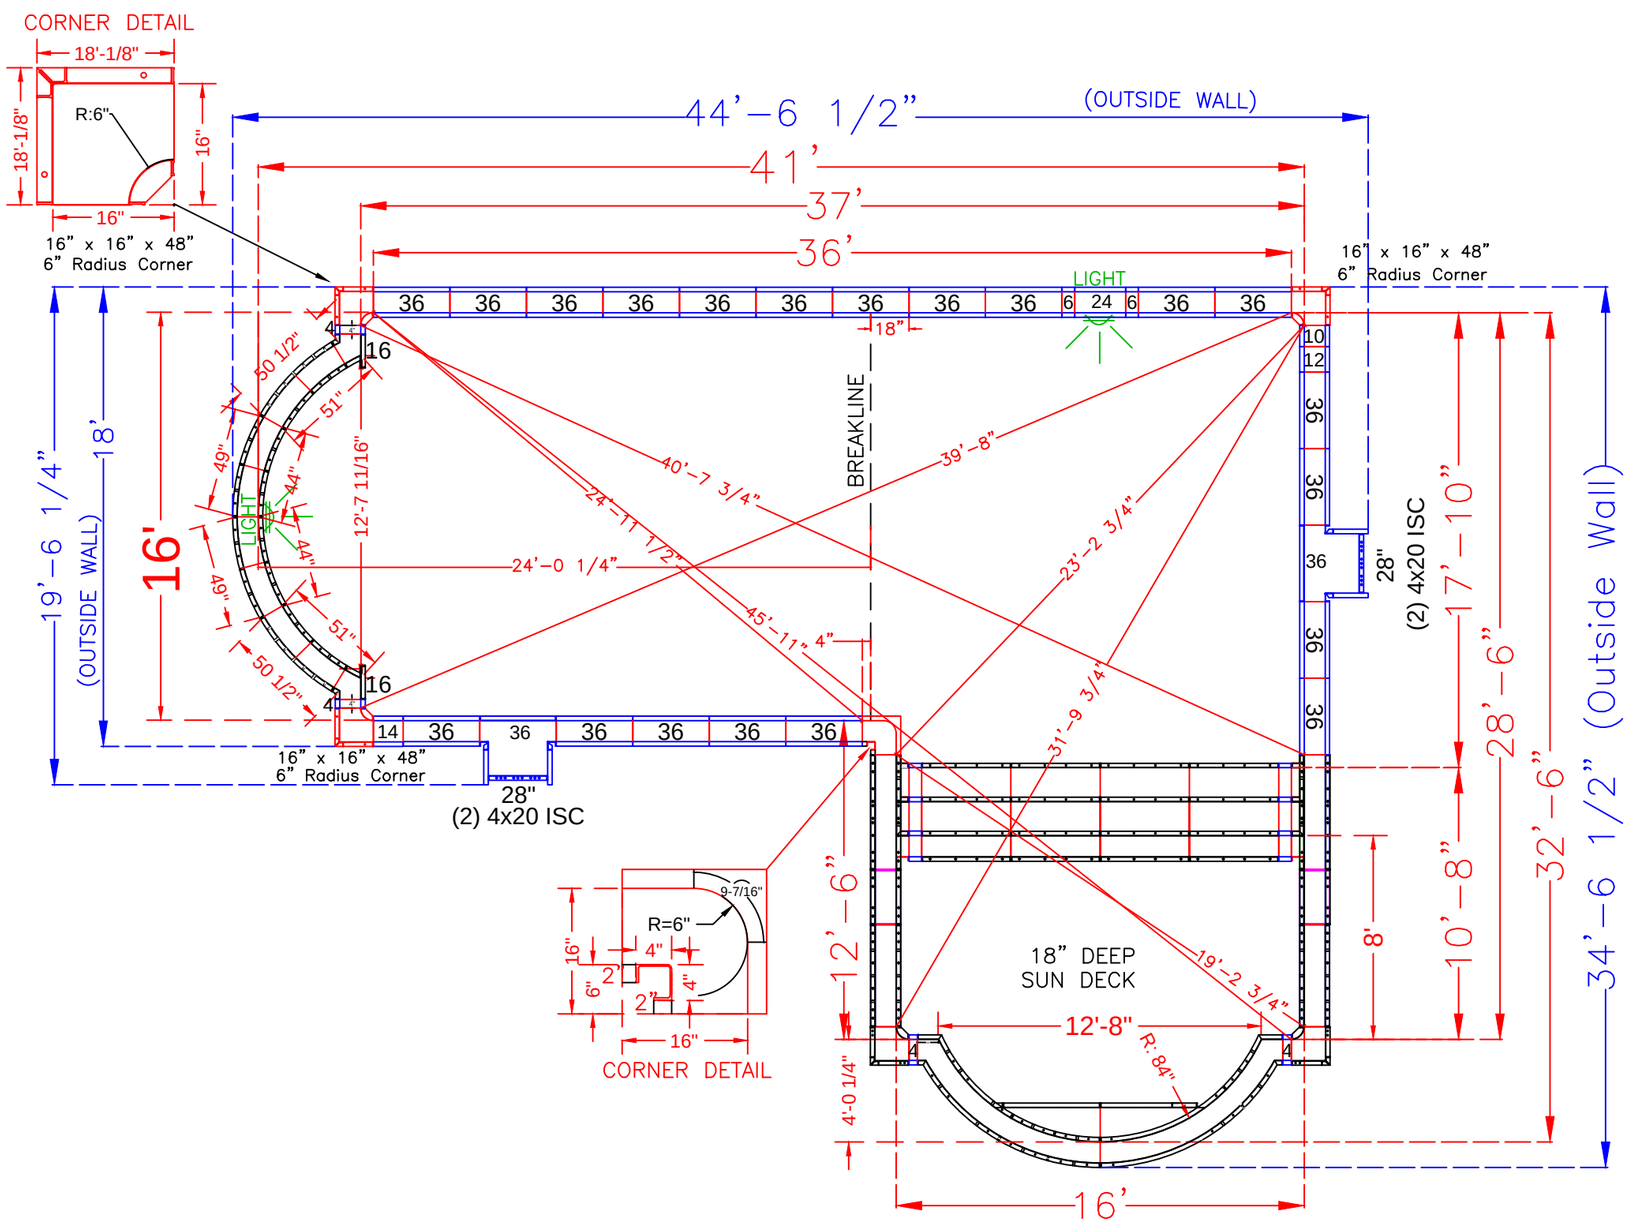

	QTY.	POOL PANEL DESCRIPTIONS
See Detail Page {	1	16' Roman End Sundeck/Step Assembly
SKIMMER SIDES {	2	4" x 20" x 48" Adj Offset Hinged ISC (Pilaster) *Skimmer
		CORNER PANELS
	3	16" x 16" x 48 w/Outside Corner-SA (6" Radius)
	1	4" x 4" x 48" Inside Corners - SA
	2	2" x 2" (*use with 4" x 4" x 48" Corner)
	1	16" x 16" w/ 6" Radius Inside Corner (9-1/2" Arc)
		STRAIGHT PANELS
	4	4" x 48" Straight Panel
	4	6" x 48" Straight Panel
	2	10" x 48" Straight Panel
	2	12" x 48" Straight Panel
	2	14" x 48" Straight Panel
	2	16" x 48" Straight Panel (for roman end connection)
	2	24 x 48" Straight Panel
SKIMMERS {	2	28" x 48" Panel
	42	36 x 48" Straight Panel
		DEEP END ROMAN RADIUS PANELS
	2	49" x 48" 94" Radius Outside Panel
	2	44" x 48" 84" Radius Inside Panel
	2	51" x 48" 84" Radius Panel
	2	50 1/2" x 4" x 48" - 94" Radius / Outside

NIEDERMAN - 163 Princeton Oval

16' x 41' x 32'-6" - 10" Concrete Wall -
Double Roman End L-Shape w / 18' Wide
Roman End Vinyl Covered Step & Sundeck Combo
Pool Perimeter = 136' Pool Area = 865 S. F.
Approximate Gallons of Pool: 25,700 Gallons

Concrete Yards
- Pool Walls & Steps: 20.5 yards (19.4 exact)

PANEL LAYOUT

JOB #: 555398
DATE: 11-12-2018
DRAWN BY: SA

REVISIONS		

SEASONAL WORLD
WE BUILD BACKYARDS!

NOTE: See Construction Plan for pool location

per pour



Qty (14) - Middle Ties - 26" Full Tie

Qty (14) - Bottom Ties - 42" Full Tie

Qty (1) - Top Center 26 1/8" Tie

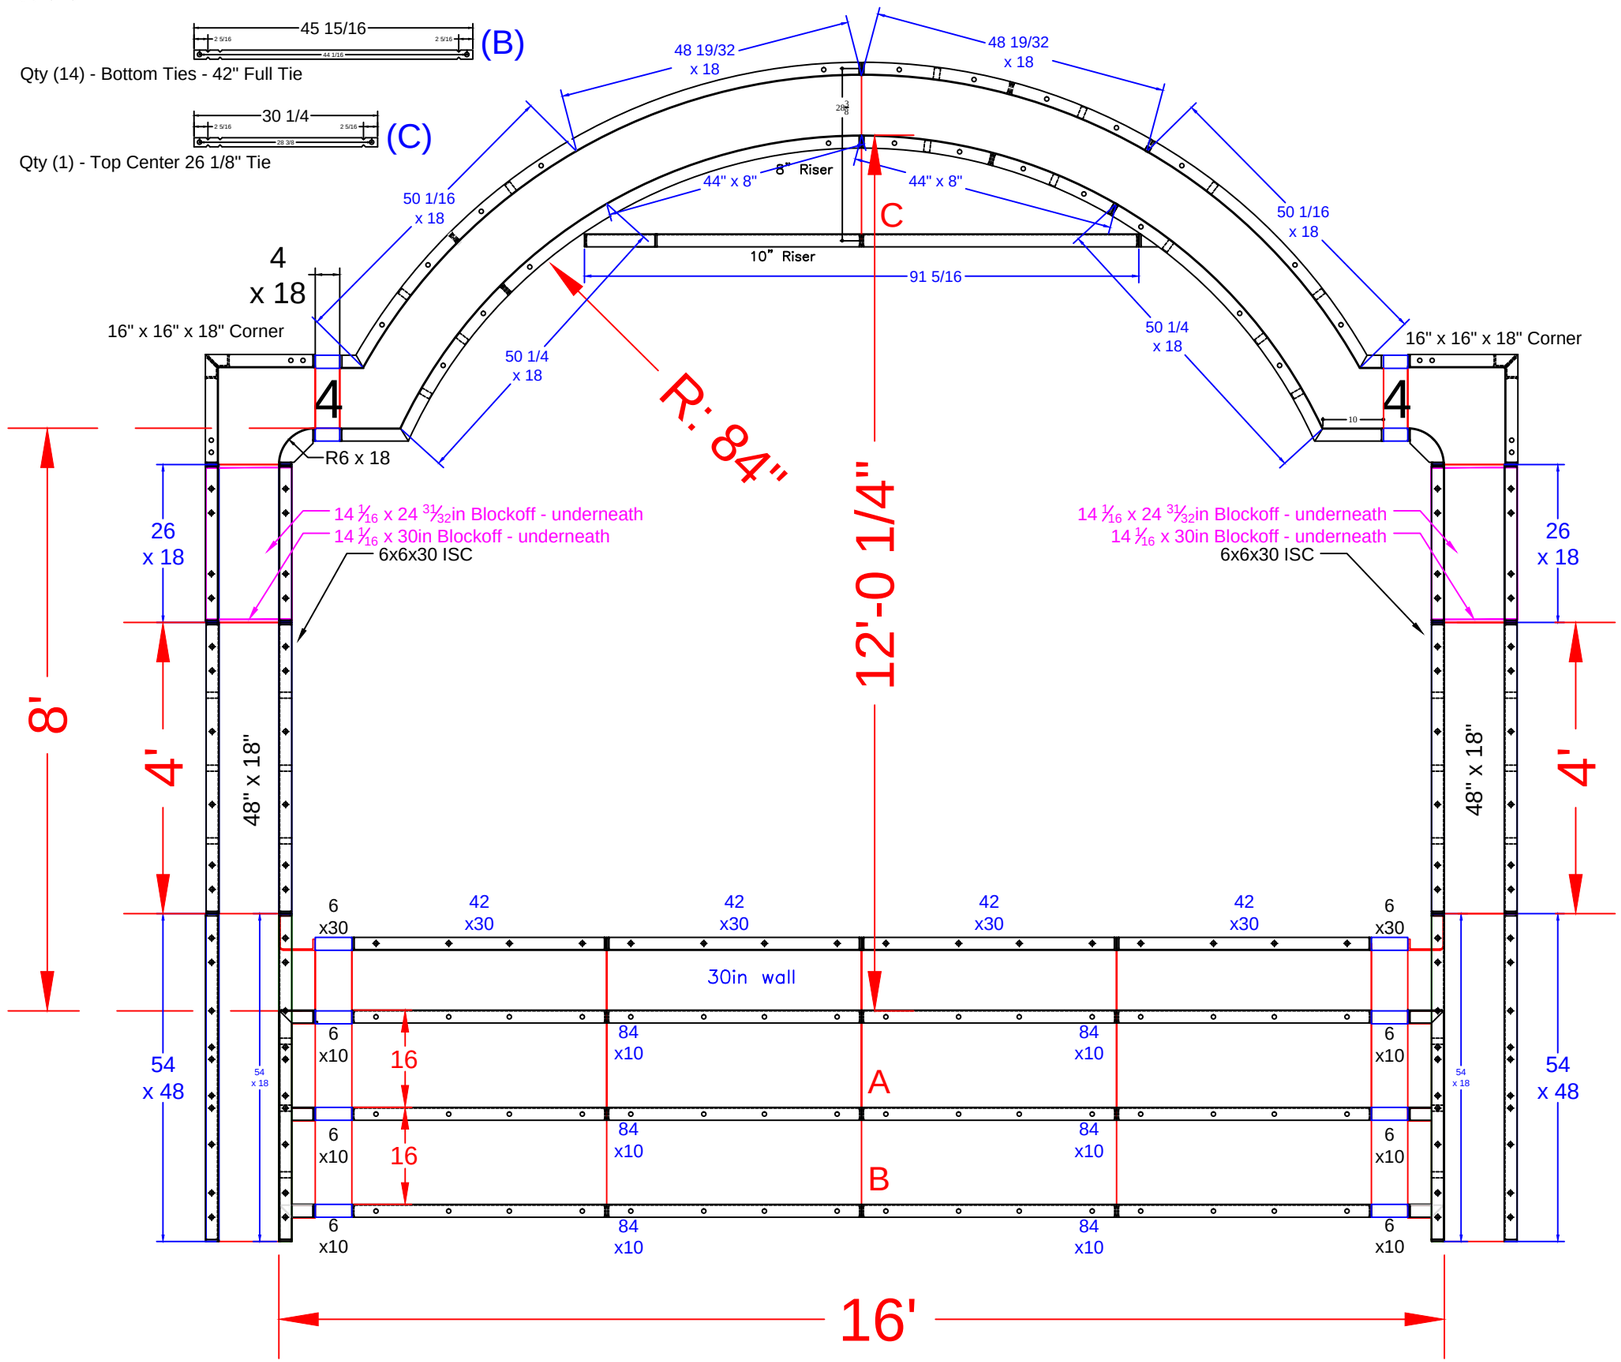

print #	QTY.	DESCRIPTION
RESSD 7.05	2	54 x 18 Wall Panel
RESSD 7.06	4	26 x 18 Wall Panel
	4	4 x 18 Wall Panel
RESSD 7.04	4	48 x 18 Wall Panel
	6	6 x 10 Riser
RESSD 7.09	6	84 x 10 Riser
RESSD 7.10	2	51 x 18 84R ISC Riser Side
RESSD 7.11	2	16x16x18 Outside Corner
RESSD 7.12	2	44 x 8 84R IS Panel Top Riser
RESSD 7.13	2	38x6x30 ISC Riser Side
RESSD 7.14	2	51 1/2 x 4 x 18 96R OS Panel
RESSD 7.16	1	91 5/16 x 10 Riser-2nd Top
RESSD 7.17	2	6x6x30 ISC
RESSD 7.18	2	6x6x18 6R Inside Corner
RESSD 7.19	2	14 1/16 x 24 31/32 Blockoff
RESSD 7.20	2	14 1/16 x 30 Blockoff
	2	6 x 30 Wall Panel
RESSD 7.02	4	42 x 30 Wall Panel

NIEDERMAN - 163 Princeton Oval

16' x 41' x 32'-6" - 10" Concrete Wall -
Double Roman End L-Shape w / 18' Wide
Roman End Vinyl Covered Step & Sundeck Combo
Pool Perimeter = 136' Pool Area = 865 S. F.
Approximate Gallons of Pool: 25,700 Gallons

Concrete Yards
- Pool Walls & Steps: 20.5 yards (19.4 exact)

SUN DECK DETAIL

JOB #: 555398
DATE: 11-14-2018
DRAWN BY: SA

SEASONAL WORLD
WE BUILD BACKYARDS!