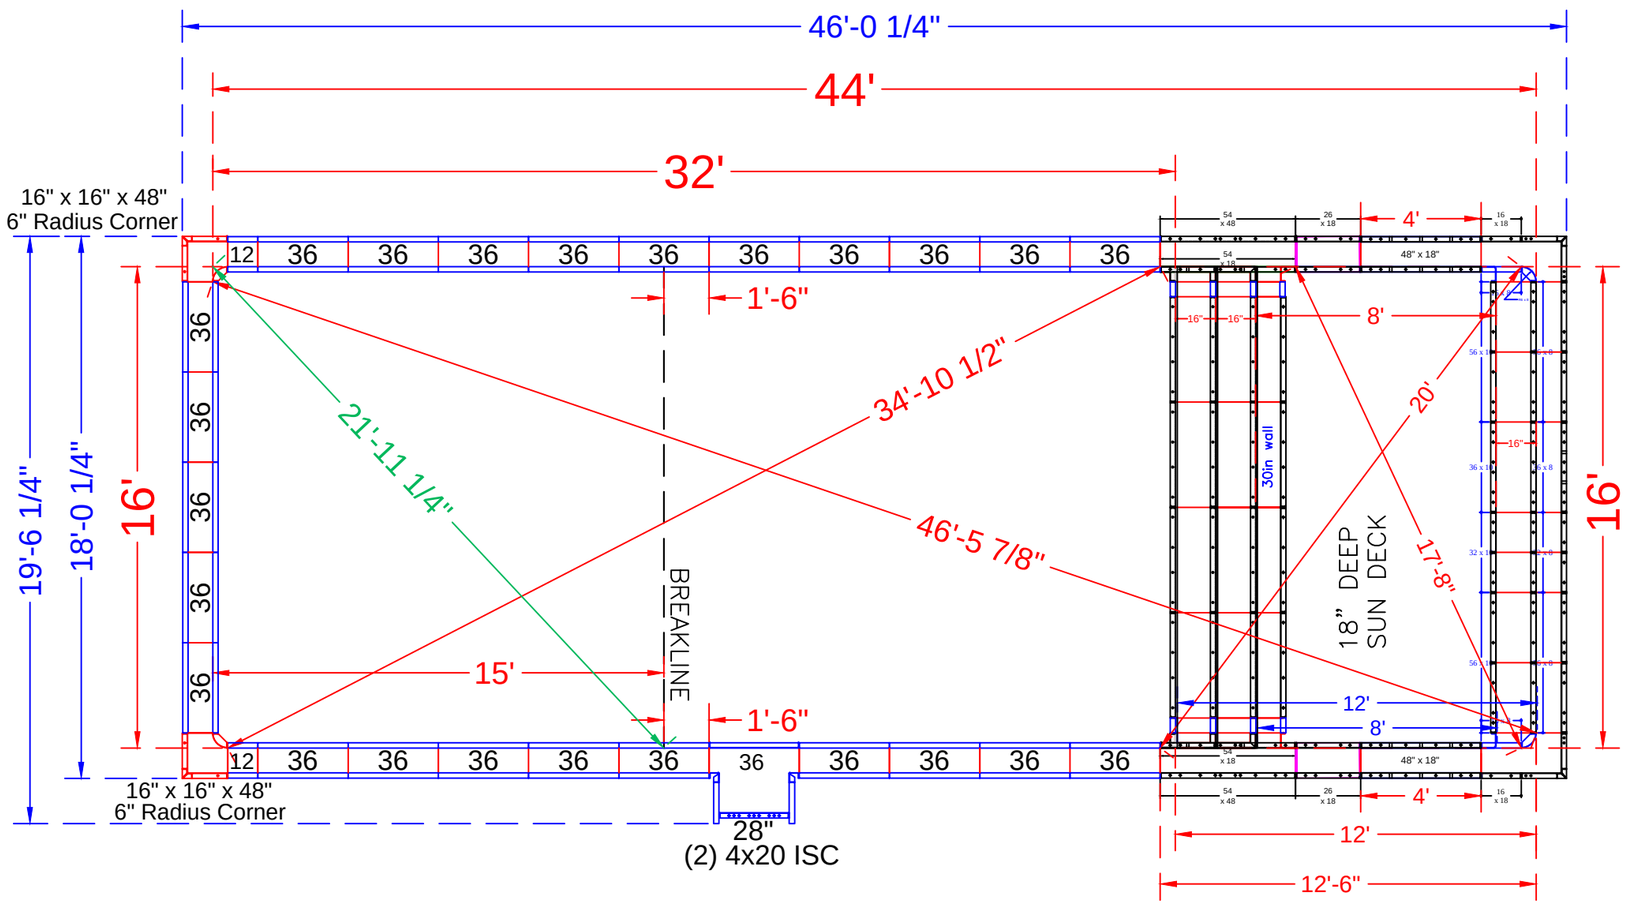

NOTE: SEE CONSTRUCTION PLANS FOR POOL LOCATION

POOL PANEL DESCRIPTIONS

	QTY.	DESCRIPTION
SEE DETAIL PAGE {	1	16' Wide Rectangle Sun Deck & Step Assembly
		CORNER PANELS & HINGES
	2	16" x 16" x 48 w/ Outside Corner-SA (6" Radius)
SKIMMER SIDES {	2	20" x 4" x 48" Adj Offset Hinged ISC (Pilaster)
		STRAIGHT PANELS
SKIMMER {	4	12" x 48" Panel
	1	28" x 48" Panel
	49	36 x 48" Panel

TEICHMAN - 563 Foothill Road

16' x 32' - 10" Concrete Wall
w/ 16' Wide Vinyl Covered Sundeck & Step
Pool Perimeter = 119' Pool Area = 704 S. F.
Approximate Gallons of Pool: 17,900 Gallons

Concrete Yards
- Pool Walls & Steps: 18 yards (17.2 exact)

PANEL LAYOUT

JOB #: 555384
DATE: 8-23-2018
DRAWN BY: SA

REVISIONS		

SEASONAL WORLD
WE BUILD BACKYARDS!

print #	print #	QTY.	DESCRIPTION	print #	print #	QTY.	DESCRIPTION	print #	print #	QTY.	DESCRIPTION
RESSD 7.03	ESSD 1.54	2	54 x 48in Wall Panel	RESSD 7.09	ESSD 4.84	6	84 x 10in Riser	RESSD 7.11	ESSD 6.16.18	2	16 x 16 x 18in OSC
RESSD 7.02	ESSD 2.42	4	42 x 30in Wall Panel		ESSD 4.56	2	56 x 10in Riser		ESSD 7.6.8.6R	2	6 x 6 x 8in - 6in Rad ISC
					ESSD 4.36	1	36 x 10in Riser		ESSD 7.6.10	2	6 x 6 x 10in ISC
RESSD 7.01.06	ESSD 2.6	2	6 x 30in Wall Panel		ESSD 4.32	1	32 x 10in Riser	RESSD 7.17	ESSD 7.6.30	2	6 x 6 x 30in ISC
RESSD 7.05	ESSD 3.54	2	54 x 18in Wall Panel					RESSD 7.13	ESSD 8.386.30	2	38x6x30in ISC Riser Side
RESSD 7.04	ESSD 3.48	4	48 x 18in Wall Panel					RESSD 7.19	ESSD 9.10.25	2	14 1/16 x 24 31/32 BO
	ESSD 3.36	1	36 x 18in Wall Panel	RESSD 7.08.06	ESSD 4.6	6	6 x 10in Riser	RESSD 7.20	ESSD 9.10.30	2	14 1/16 x 30 Blockoff
RESSD 7.07	ESSD 3.28	4	28 x 18in Wall Panel		ESSD 5.56	2	56 x 8in Riser				
RESSD 7.06	ESSD 3.26	4	26 x 18in Wall Panel		ESSD 5.36	1	36 x 8in Riser				
					ESSD 5.32	1	32 x 8in Riser				
	ESSD 3.16	4	16 x 18in Wall Panel								
					ESSD 5.16	2	16 x 8in Riser				

per pour

(A)

Qty (30) - Middle Ties & Top - 26" Full Tie



(B)

Qty (14) - Bottom Ties - 42" Full Tie

NOTE: DIG SUNDECK 18" DEEP ONLY

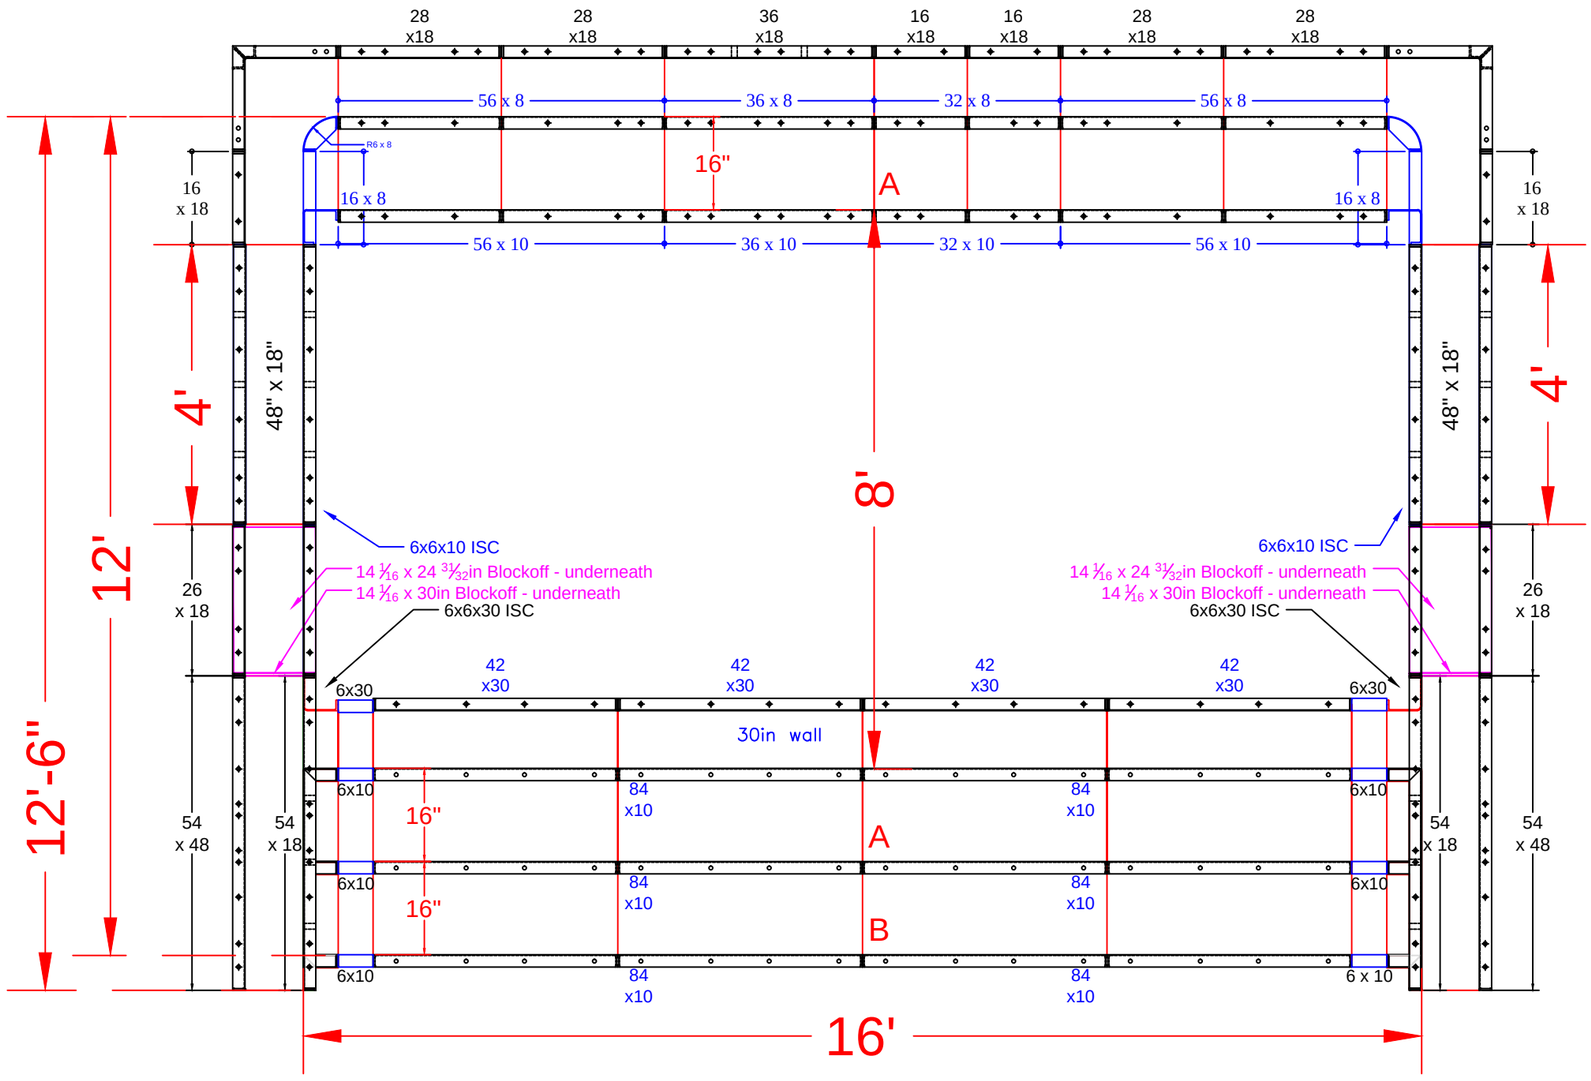

TEICHMAN - 563 Foothill Road

16' x 32' - 10" Concrete Wall
w/ 16' Wide Vinyl Covered Sundeck & Step
Pool Perimeter = 119' Pool Area = 704 S. F.
Approximate Gallons of Pool: 17,900 Gallons

Concrete Yards
- Pool Walls & Steps: 18 yards (17.2 exact)

SUN DECK DETAIL

JOB #: 555384
DATE: 8-23-2018
SCALE: 1' = 1/8 "
DRAWN BY: SA

SEASONAL WORLD
WE BUILD BACKYARDS!